
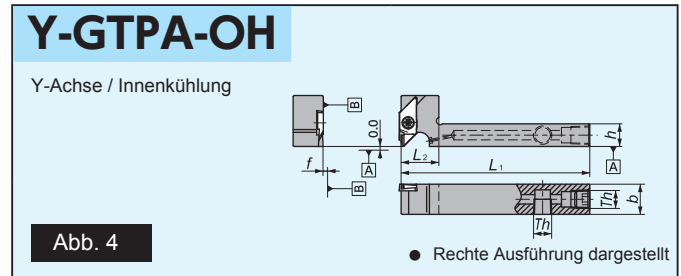
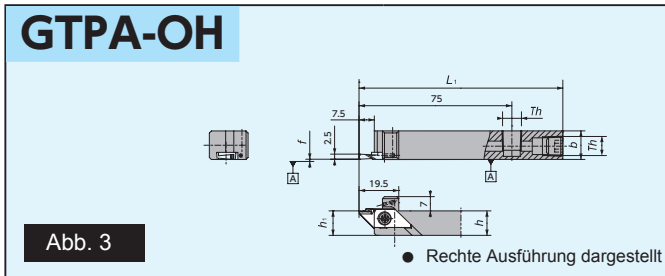
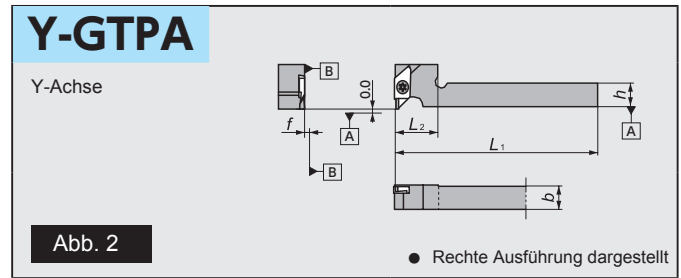



## Empfohlen für Aluminiumspulen

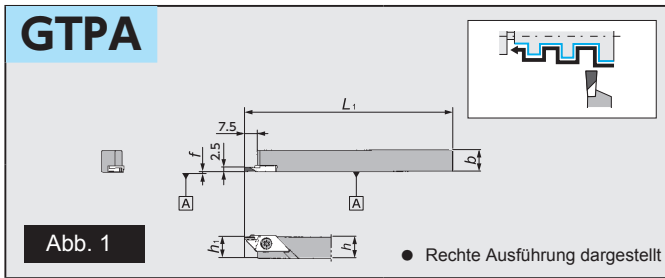

## Abmessungen und Ersatzteilm Informationen

Abb.	Artikelnr.		Bezeichnung	Standard		Abmessungen (mm)						Stechtiefe (mm) w	Platte	Ersatzteile	
	R	L		R	L	h	b	L <sub>1</sub>	h <sub>1</sub>	f	L <sub>2</sub>			Spannschraube	Schlüssel
1	5552401		<b>GTPA</b> 1010	●		10	10		10			2.0 2.5	GTPA	LRIS-4 * 10PW	CLR-15S
	5552419		<b>1212</b>	●		12	12	120	12	0.1	—				
	5577291		<b>1616</b>	●		16	16		16						
2	5563820		<b>Y-GTPA</b> 1216	●		12	16	120	—	0.1	20	2.0 2.5	GTPA	LRIS-4 * 12PW	CLR-15S
3	5912845		<b>GTPA</b> 1214H-OH	●		12	14	100	12	0.1	—				
4	5930185		<b>Y-GTPA</b> 1014FSS-OH	●		10	14	80			15				
	5911482		<b>1216HS-OH</b>	●		12	16	100	—	0.1	20				
	5911490		<b>1616H-OH</b>	●		16	16				25				

## Wendeschneidplatten

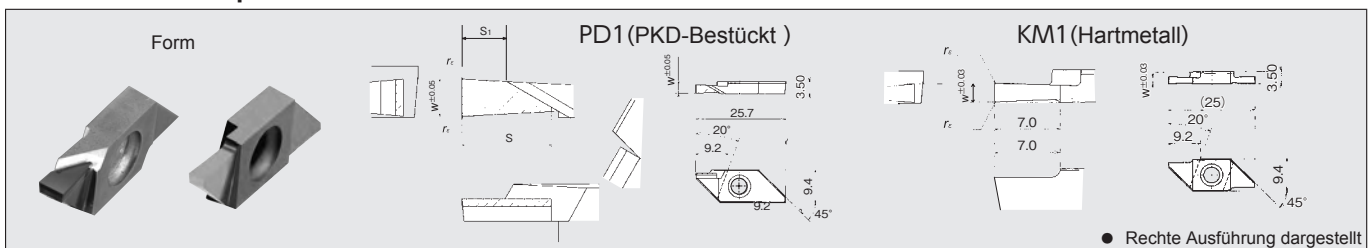

I Bezeichnung	Abmessungen (mm)				Max Schnitttiefe	PKD		Hartmetall		
	w	s	s <sub>1</sub>	r <sub>e</sub>		PD1	Standard	KM1	Standard	
<b>GTPA20FRN01</b>	2.0	6.0	4.0	0.1以下	5.0	5552385	●			
<b>20FRN01</b>		—	—		6.0				5576525	●
<b>20FRN01-SH</b>		4.0	2.0		3.0	5966114	●			
<b>GTPA25FRN01</b>	2.5	6.0	3.0		5.0	5552393	●			
<b>25FRN01</b>		—	—		6.0				5576533	●
<b>25FRN01-081</b>		4.0	1.0		3.0	5561808	●			