



TMV Chipbreaker

For External turning | Vibration / Oscillation & Conventional cutting Dual-Purpose Chipbreaker

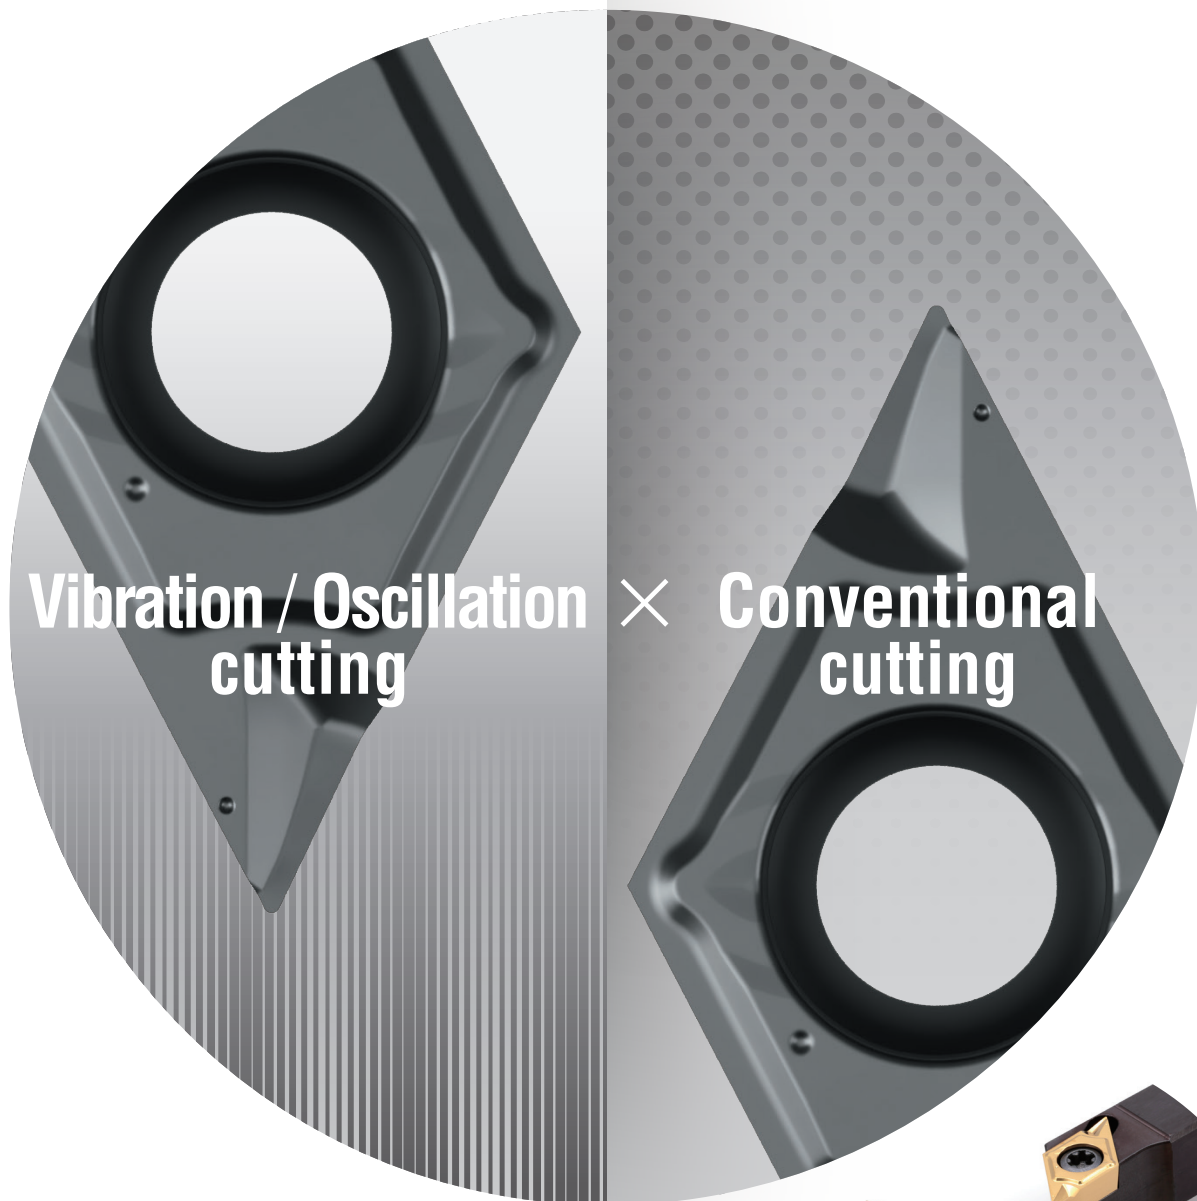

Vibration / Oscillation
cutting

Conventional
cutting

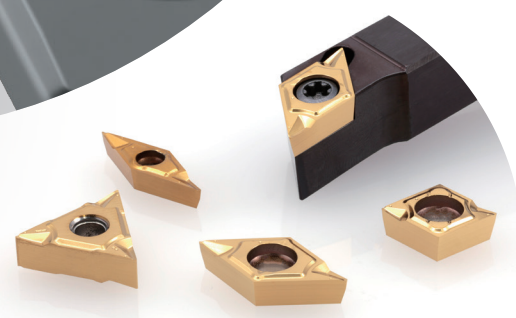





DOC range $a_p=0.5\sim 2.0\text{mm}$

TMV chipbreaker can be used for both purposes, Vibration/Oscillating & Conventional cutting.
Wiper insert has been added to the lineup for broader use.

For Vibration/Oscillation cutting

Good chip control with Tough cutting edge

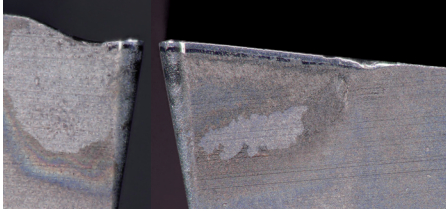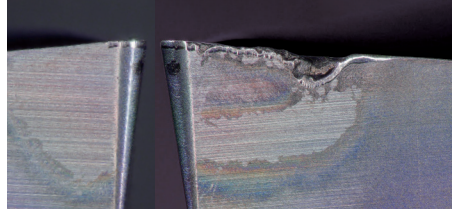Practical examples

		TMV Chipbreaker	Conventional
Machine	Cincom L20-LFV		
Work material	SUS316L		
Cutting speed	80 m/min		
Feed	0.05 mm/rev		
D.O.C. (a _p)	1.0 mm		
Coolant	WET		
Vibration conditions	mode1 Q0.5 D0.5		
	Edge image		
	Machining distance 8km		
	Actual machining chips		

Recommended conditions

Grade	Workpiece material	Cutting conditions		
		Cutting speed (m/min)	Feed (mm/rev)	D.O.C (mm)
NTK650	Ni base alloy / Steel / Stainless steel (Inco718 / S45C / SUS440C etc.)	40 - 120	0.02 - 0.06	0.5 - 2.0
ST4	Austenitic stainless steel (SUS304 / SUS316L etc.)	40 - 100		
DM4	Carbon steel / Alloy steel / Free-cutting steel (S45C / SCM435 / SUM22 etc.)	50 - 120		
TM4	Non-ferrous (Aluminum / Titanium etc.)	60 - 150		

CITIZEN

star

P	Q	D
Vibration mode	Vibration Ratio	Frequency
mode1	0.5	0.5

A	D
Chip length coef.	Amplitude coef.
2.0 or more	2.0 or more

Product Brochure



Product Brochure





**Vibration / Oscillation
cutting**



**Conventional
cutting**





TMV Chipbreaker

For External turning | Vibration / Oscillation & Conventional cutting Dual-Purpose Chipbreaker

For Conventional cutting

Stable chip control under a wide range of conditions

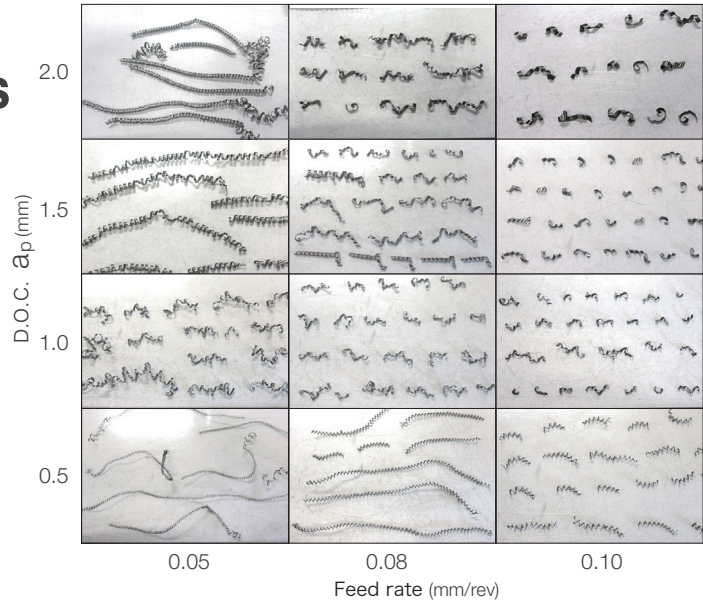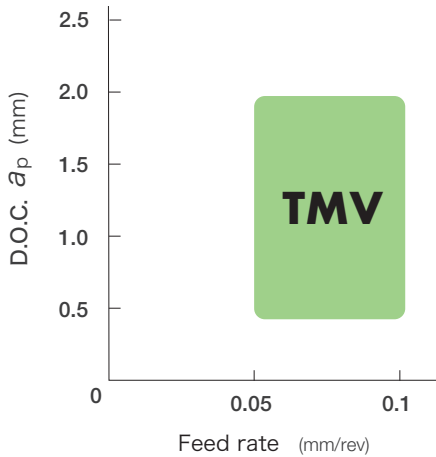


Cutting conditions
 Work material : SUS316L ϕ 16
 Cutting speed : $V_c=80\text{m/min}$
 Feed : $f=0.05\sim 0.10\text{mm/rev}$
 Coolant : WET

TMV-WP ^{New}


Double the feed rate and tool life & Reduce machining time by half.

Superior surface finish even under high feed conditions thanks to the wiper. Contributes to extended tool life by increasing feed.

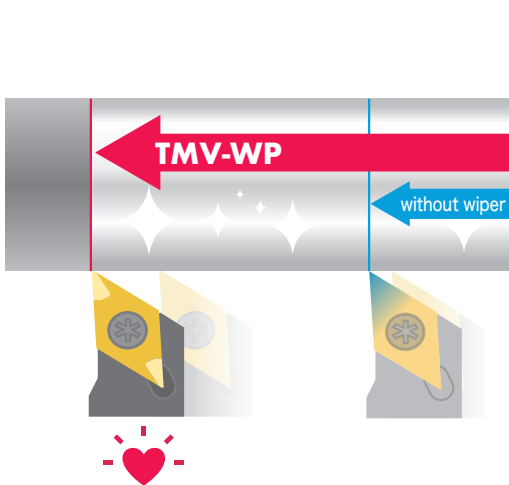

- Increased feed rate reduces machining time!
- Surface roughness is maintained by wiper
- Extend tool life by reducing cutting distance

Function range

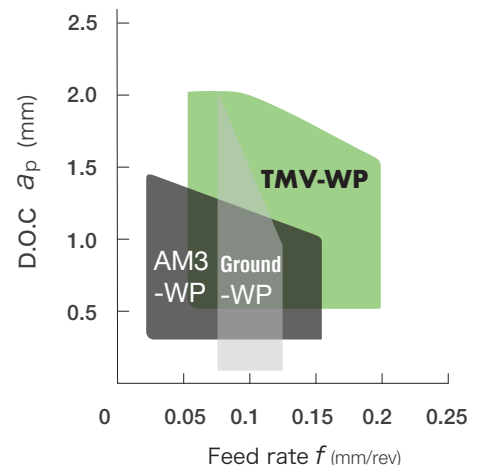

Please use 93 degree set angle toolholder

* The wiper function is effective when the cutting edge is parallel to the workpiece surface.

For Vibration/Oscillation or Conventional cutting, It can extend tool life and achieve good chip control.


Performance

- **Significantly reduces cutting edge damage**


Longer tool life can be expected even when machining difficult-to-cut materials.


- **Stable chip control**

The large chipbreaker produces regular and stable chip shapes.

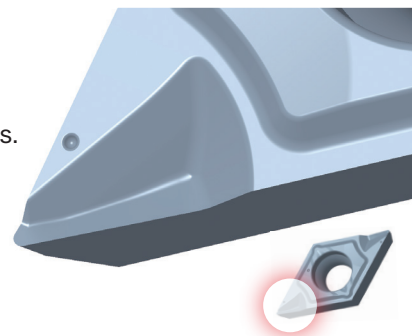



Vibration/Oscillation cutting practical examples

Component name		Piston
Insert		CCGT09T301MRTMV ST4
Tool Holder		SCLCR type
		SUS430 / 430SS
Workpiece		
Cutting conditions	Cutting speed (m/min)	45
	Revolutions per minute (rpm)	1,200
	Feed (mm/rev)	0.02
	DOC (mm)	2.0
	Machining area	Facing + OD turning
Coolant		WET

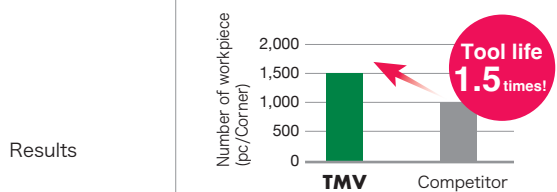


Current tool had short tool life due to sudden breakage and poor machined surface quality, TMV successfully improved both and gaining 1.5 times longer tool life.


Component name		Bolt
Insert		DCGT11T302MRTMV ST4
Tool Holder		SDJCR type
		SUS304 / 304SS
Workpiece		
Cutting conditions	Cutting speed (m/min)	51
	Revolutions per minute (rpm)	4,680
	Feed (mm/rev)	0.03
	DOC (mm)	1.2
	Machining area	Facing + OD turning
Coolant		WET

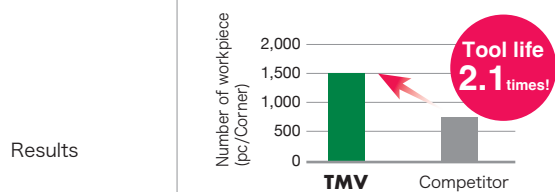


Current tool had short tool life due to dimensional and appearance defects, TMV improved dimensional accuracy and chip control. Additionally, burrs and protrusions were reduced, achieving double life time.


Conventional cutting practical examples

Component name		Precision equipment
Insert		DCGT11T302MRTMV TM4
Tool Holder		SDJCR type
		SUS303 / 303SS
Workpiece		
Cutting conditions	Cutting speed (m/min)	80
	Revolutions per minute (rpm)	910
	Feed (mm/rev)	0.07
	DOC (mm)	0.4
	Machining area	OD turning
Coolant		WET

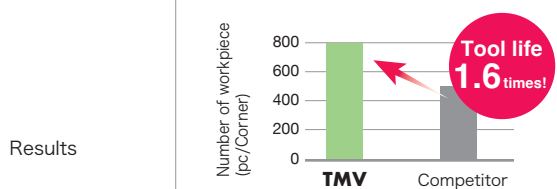

Current tool had unbroken long continuous chips. TMV can have broken chips even in conventional cutting, reducing surface roughness caused by chips and extending tool life 1.6 times.

Component name		Valve
Insert		DCGT11T302MRTMV TM4
Tool Holder		SDJCR type
		A2017
Workpiece		
Cutting conditions	Cutting speed (m/min)	250
	Revolutions per minute (rpm)	5,000
	Feed (mm/rev)	0.08
	DOC (mm)	1.0
	Machining area	Facing + OD turning
Coolant		WET

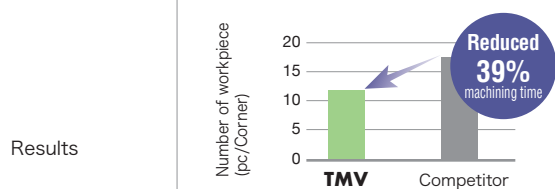

TMV can have broken chips with higher feed rate, Reducing machining time 39% even in conventional cutting. Additionally, the broken chips reduce cleaning frequency inside the machine, enhancing productivity.

Shape	Item number	PVD grade				Dimension				TMV centerline lowering amount *	
	Metric	NTK650	ST4	DM4	TM4	IC	Thickness	Corner Radius	Wiper width	Centerline height from the reference surface (Blue)	Centerline height from the reference surface (Red)
	DCGT11T301MRTMV	●	●	●	●	9.525	3.97	0.08	-	0.51	0.08
	DCGT11T302MRTMV	●	●	●	●	9.525	3.97	0.18	-	0.53	0.10
	DCGT11T304MRTMV	●	●	●	●	9.525	3.97	0.38	-	0.55	0.12
	DCGT11T301MRTMV-WP	●	●	○	○	9.525	3.97	0.08	(0.3)	0.51	0.08
	DCGT11T302MRTMV-WP	●	●	○	○	9.525	3.97	0.18	(0.3)	0.53	0.10
	CCGT09T301MRTMV	●	●	●	●	9.525	3.97	0.08	-	0.52	0.08
	CCGT09T302MRTMV	●	●	●	●	9.525	3.97	0.18	-	0.53	0.09
	CCGT09T304MRTMV	●	●	●	●	9.525	3.97	0.38	-	0.55	0.12
	VCGT110302MRTMV	●	●	●	●	6.35	3.18	0.18	-	0.53	0.07
	VCGT110304MRTMV	●	●	●	●	6.35	3.18	0.38	-	0.55	0.10
	TNGG160402MRTMV	●	●	●	●	9.525	4.76	0.18	-	0.53	0.09
	TNGG160404MRTMV	●	●	●	●	9.525	4.76	0.38	-	0.56	0.11

○ Made-to-order products

*Centerline height is nominal, please adjust using actual measured values during setup.



NTK CUTTING TOOLS JAPAN
2808 Iwazaki, Komaki, Aichi 485-8510, Japan

CONTACT

www.ntkcuttingtools.com/global/contact/

