

Thread Whirling

Features





WATCH ON
New Double-lead video is on **You Tube**



- NTK's unique patented design technology makes precise and correct inserts possible the first time, *without any redesign or remanufacturing even if it is a multiple-lead thread*
- The sharper cutting edges produce a better surface finish and longer tool life than competitor's inserts

Form Double-lead or Multiple-lead with Single Pass

Patented

	Double-lead threads	Triple-lead threads
Work	Bone screw	Worm gear
Work material	Ti-6Al-4V ELI	brass
Work appearance		
Insert appearance		
Major Dia.	$\phi .157"$ (4.0mm)	$\phi .278"$ (7.0mm)
Minor Dia.	$\phi .094"$ (2.4mm)	$\phi .185"$ (4.7mm)
Lead [Pitch×No. of Lead]	$.135"$ (3.42mm) [.067"×2 (1.71mm×2)]	$.193"$ (4.9mm) [.064"×3 (1.63mm×3)]

- Can reduce cycle time by more than half
- NTK can achieve what other competitors cannot

Double-lead Bone Screw Process Example

- 1 1st thread whirl at taper part
- 2 Rotate the bar 180° and whirl the 2nd thread on same part as 1
- 3 Thread whirl whole straight part
- 4 Thread whirl at very last part to get two-exits, after back of bar has been backed up a half lead (one pitch) and rotated 180°

Special Item Capability

- Even though almost all bone screw shapes are special, NTK thread whirling inserts can make the correct shape of thread the first time, without any redesign or remanufacturing
- Basically NTK thread whirling inserts are ground with topping and coated

Recommended Cutting Conditions

No. of teeth		9	6	4	
Conditions					
Main spindle	RPM	10 - 40	10 - 25	7 - 15	Faster RPM reduces machining time
	F	5400 - 14400	3600 - 9000	2500 - 5400	
Whirling cutter	RPM	1500 - 4000			
Feed Rate		Same as thread-lead			
Bar stock	φ	~φ.400" *		~φ.200"	* For cutter with φ 12mm ID
Work Material		Ti-6Al-4V ELI / 316SS / Titanium			


- Formula for calculating thread whirling process time

$$T \text{ (Seconds)} = \frac{60 \times \text{Thread length}}{\text{Main spindle rpm} \times \text{Feed rate (Thread lead)}}$$


Ex.) Double lead / 2" length / .100" lead (2×.050" pitch) / 30 rpm

$$T \text{ (Seconds)} = \frac{60 \times 2}{30 \times .100"} = 40 \text{ Seconds}$$


Applicable Thread Geometry (Approximated)

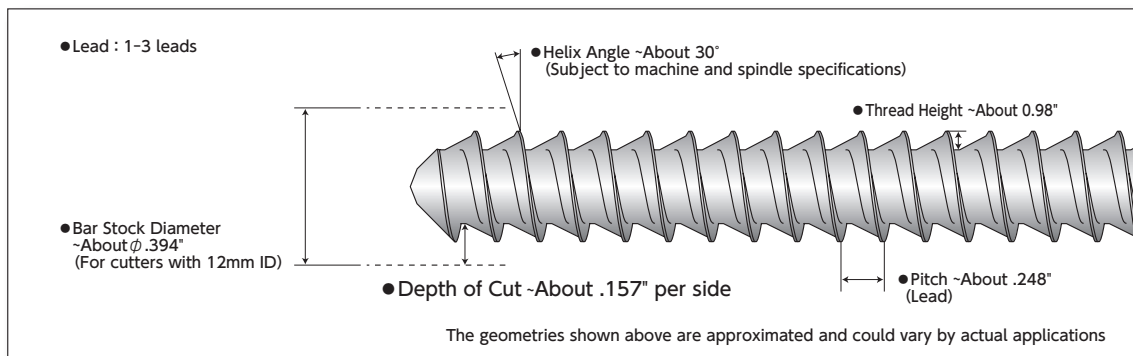


Thread Whirling System



Type 1







Type 2
Quick-change



Type 3
Quick-change

Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt	
CITIZEN	M ₃ 32-VIII	Gang	CITIZEN	BTW-4000	0° - 15°	TWC9C0746HP1	●	9	$\phi 12$	1	$\phi 46$	$\phi 35$	M3	
	L20/L20E/L20X	Gang		BTW-3000 BTW-3100	0° - 15°									
	L32/L32X			BTW-3100	0° - 15°									
	D25	Gang		BTW-6000	± 25°	TWC9C1040HP1 TWC6C1040HP1 TWC9C1040HP1-D16	● ● ●	9 6 9	$\phi 12$ $\phi 12$ $\phi 16$	1	$\phi 33$	$\phi 40$	M3 (Provided with spindle)	
	L32X				BTW-5000									± 25°
	L20X													0° - 15°
	M16				BTW-2000									± 25°
	A20													
	A32													
	L20/L20X			BTW-1000	± 25°									
	L32/L32X													+20° - -25° ± 25°
	M20													
	M32													
	C32			L20	± 25°									
	L20													
	M20			M ₃ 32	± 25°									
	M ₃ 32													
	C12/16	Gang	CITIZEN	LTR0170	± 15°	TWC9C1037P2	●	9	$\phi 12$	2	$\phi 37$	$\phi 30.5$	CS0310(M3)	
	M12/16	Turret		LTR0128/LTR0168										
	M12/16 III			MSW105										
	M20/32 III	Gang		KSW110										
	L20			LTR0183	± 15°	TWC9J1040P2	●	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	H-M4 × 12	
	M20/32	LTR0169												
	M20/32	Turret												
	K16	Attachment	PCM	GSW-101	± 15°	TWC6P1620HP1-D9	●	6	$\phi 9$	1	$\phi 32$	$\phi 26$	M4 (Provided with spindle)	
	L20	Gang		LSW-101-L20	± 10°	TWC9P1340P2	●	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	M4 (Provided with spindle)	
	M12/16	Turret		MSW-101										
M20/M32	KSW-101													
STAR	SW-12	Attachment	STAR	10159	± 20°	TWC4S1433HP1	●	4	$\phi 8$	7	$\phi 38$	$\phi 27$	CS0310(M3)	
	ECAS-12/20			54178	± 10°	TWC9S1640P2	●	9	$\phi 12$	3	$\phi 40$	$\phi 33$	CS04148S(M4)	
	SB-20R			0M171	-20° - 0°									
	SR-20J/20R III	68172		-20° - 0°										
	20R IV/32J II	59172												
	ECAS-20T	58171		± 20°										
	ECAS-32T	10172		± 10°										
	SR-38	43156		± 20°										
	ST-38	45172		± 10°										
	SV-12	42173		± 10°										
	SV-20/SV-20R	43172		± 10°										
	SV-32	43156		± 20°										
	SV-38R													
	TSUGAMI	BH20/BH38		Turret	TSUGAMI	3263-Y481	± 10°	TWC9TS2252P2	●	9	$\phi 12$	3	$\phi 52$	$\phi 42$
BS20		Attachment		3214-Y1371		± 10°	TWC9TS20550P2	●	9	$\phi 16$	3	$\phi 50$	$\phi 40$	CS0515(M5)
SS20/SS26/SS32 B0265/B0266- II B0325/B0326- II		Attachment	3268-Y450 3268-Y451	0° - 10°		TWC9TS2244HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)	
			3281-Y450 3281-Y451	0° - 20°		TWC9TS1944HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)	
			S205/S206	3220-Y6540 3220-Y6541		0° - 25°	TWC9TS1644HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)
0° - 30°						TWC9TS1044HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)	
B0123/B0124/B0125/ B0126- II / III B0203/B0204/B0205/ B0205/B0206- II / III			3268-Y271	0° - 10°		TWC9TS1952P2BK	●	9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)	
				0° - 20°		TWC9TS1652P2BK	●	9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)	
SS20/SS26/SS32		—	Using B-axis	0° - 15°		TWC4TS3010HP1	●	4	$\phi 7$	5	$\phi 10$	For single-corner inserts only		
SS207/SS267/SS327														

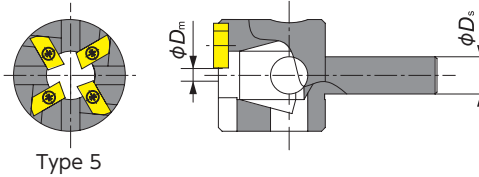

Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt
TORNOS	DECO 10/10a	Attachment	TORNOS	224-1900	$\pm 15^\circ$	TWC6TO11542HP1	●	6	$\phi 12$	4	$\phi 42$	$\phi 32$	CS0410(M4)
	Evo DECO 10/10			242-1900									
	DECO 13a/13e			226-1900									
	Evo DECO 16/10			243-1900	$\pm 15^\circ$	TWC9TO10540P2	●	9	$\phi 12$	3	$\phi 40$	$\phi 31$	CS0410(M4)
	Swiss ST26			246-1900									
	DECO 20a			223-1900									
	DECO 26a			225-1900	$\pm 25^\circ$	TWC9TO12050P2-D18	●	9	$\phi 18$	3	$\phi 50$	$\phi 40$	CS0410(M4)
	Sigma 20			234-2750									
	Sigma 32			236-2750									
HASEGAWA	JS-1W	—	HASEGAWA	—	$0^\circ - 20^\circ$	TWC9HA22594P2		9	$\phi 16$	6	$\phi 94$	$\phi 76$	CS0620(M6)

■ Spare Insert Holder (Cartridge)

Item number	No. of tooth	ϕD_m (mm)	Compatible cutters
TWC6HP2	6	12	For Type 2 and Type 3*
TWC9HP2	9	12	For Type 2 and Type 3*
TWC9HP2-D16	9	12	For Type 6

Note: Insert holder comes with insert screws and wrench
Insert holder mounting screw is not included


*Cannot be used for TWC9TS20550P2, TWC9TO12050P2-D18 and TWC9HA22594P2

■ Spare Parts

Description	Item number
Insert Screw	FSI17-2.2×6.0
For 4mm thick inserts	
For 6.5mm thick inserts	FSI24-2.2×7.9
Wrench	T-07
Insert Holder Mounting Bolt	CS0309-TW


NTK's Unique Attachment System

NTK's whirling insert holder can be attached and detached without removing mounting screws

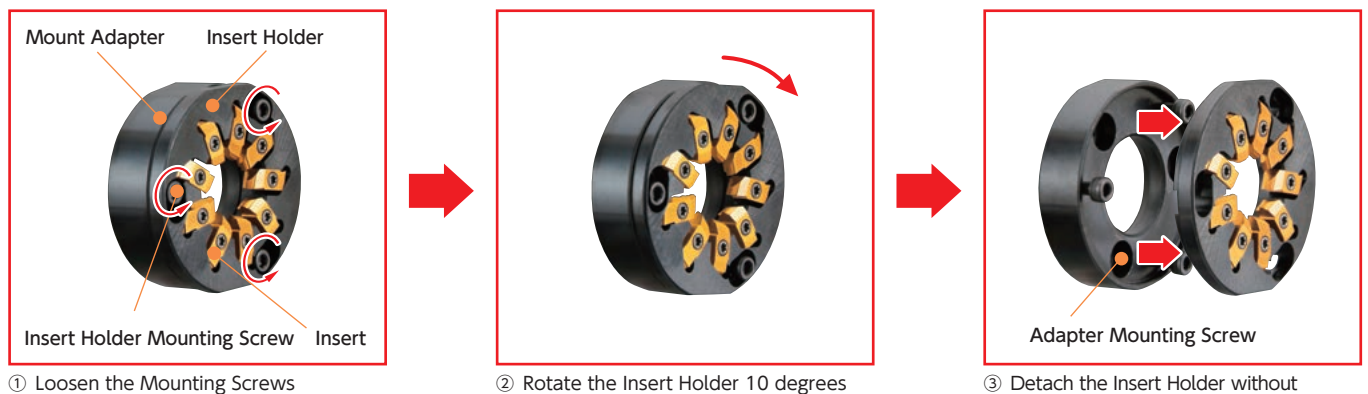

Basic Insert Grade


ZM3



- ZM3 is our basic grade for NTK thread whirling
- ZM3 offers excellent surface finish
- NTK can make inserts with other coatings to meet customers demands


NTK Experiences and Solutions Example

For absolute flat on OD

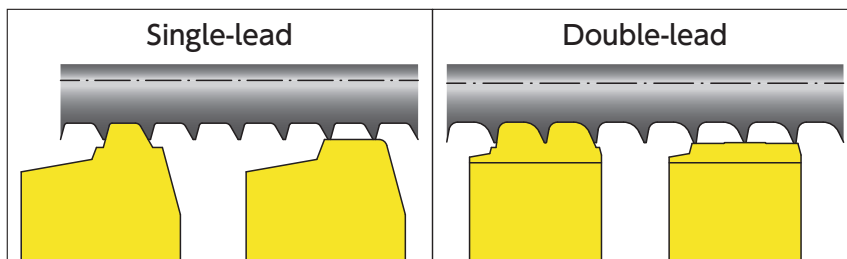

- Two insert combination brings absolute flat on OD to meet the drawing

For tiny thread

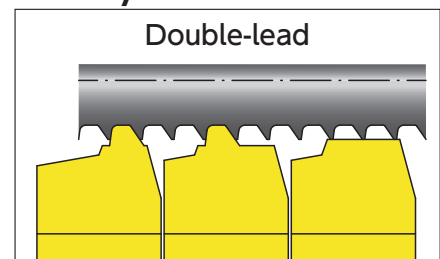


- NTK's Thread Whirling system can machine small diameter multi-lead screws to spec, with lower tool pressure, by using several types of specially designed and accurately ground inserts on the cutter.


Standard Thread Whirling Inserts (two-sided) for Medical ISO Style Threads

4mm thickness insert


(Note: Must use Thread whirling cutters with 12mm ϕ Dm dimension. See page U18-19 to find ϕ Dm for each cutter.)




ISO5835 HA



ISO5835 HB





ISO9268 HC






ISO9268 HD



											Metric dimensions	
Item number	ISO Standard		d_1	d_5	P	e	r_4	r_5	α	β	Supposition material Dia.	Coated Carbide
												ZM3
TW5835-HA1.5-D12	ISO5835	HA1.5	1.5 ⁰ _{0.15}	1.1 ⁰ _{0.1}	0.5	0.1	0.3	0.1	35°	3°	ϕ8	○
TW5835-HA2.0-D12		HA2.0	2.0 ⁰ _{0.15}	1.3 ⁰ _{0.1}	0.6	0.1	0.4	0.1	35°	3°		○
TW5835-HA2.7-D12		HA2.7	2.7 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1	0.1	0.6	0.2	35°	3°		○
TW5835-HA3.5-D12		HA3.5	3.5 ⁰ _{0.15}	2.4 ⁰ _{0.15}	1.25	0.1	0.8	0.2	35°	3°		○
TW5835-HA4.0-D12		HA4.0	4.0 ⁰ _{0.15}	2.9 ⁰ _{0.15}	1.5	0.1	0.8	0.2	35°	3°		○
TW5835-HA4.5-D12		HA4.5	4.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°		○
TW5835-HA5.0-D12		HA5.0	5.0 ⁰ _{0.15}	3.5 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°	ϕ10	○
TW5835-HB4.0-D12	ISO5835	HB4.0	4.0 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1.75	0.1	0.8	0.3	25°	5°	ϕ8	○
TW5835-HB6.5-D12		HB6.5	6.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	2.75	0.2	1.2	0.8	25°	5°	ϕ10	○
TW9268-HC2.9-D12	ISO9268	HC2.9	2.79 to 2.9	2.03 to 2.18	1.06	0.1max	—	—	—	—	ϕ8	
TW9268-HC3.5-D12		HC3.5	3.43 to 3.53	2.51 to 2.64	1.27	0.1max	—	—	—	—		
TW9268-HC3.9-D12		HC3.9	3.78 to 3.91	2.77 to 2.92	1.27	0.1max	—	—	—	—		
TW9268-HC4.2-D12		HC4.2	4.09 to 4.22	2.95 to 3.25	1.27	0.1max	—	—	—	—		
TW9268-HD4.0-D12		HD4.0	4.0±0.03	2.92±0.03	1.59	0.1	—	—	45°	10°		
TW9268-HD4.5-D12		HD4.5	4.5±0.03	2.92±0.03	2.18	0.1	—	—	45°	10°		



Application Examples

Double-lead Bone Screw			
Work Material : Ti-6Al- 4v ELI			
Bar Stock Dia.	φ .375	Number of start	2
Major Dia.	φ .157	Helix Angle	28.5°
Minor Dia.	φ .098	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	15	Speed of whirling cutter (rpm)	3,500
Lead = Feed (IPR)	.217	Result	OK
NTK Thread Whirling			
Competitor's Thread Whirling	 <div>Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.</div>		
NTK thread whirling succeeded in double lead screw machining when one of the major thread whirling suppliers has failed many times.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ .250	Number of start	2
Major Dia.	φ .118	Helix Angle	15.4°
Minor Dia.	φ .083	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	11	Speed of whirling cutter (rpm)	2,200
Lead = Feed (IPR)	.087	Result	OK
NTK Thread Whirling			
Competitor's Thread Whirling	 <p>Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.</p>		
Customer was concerned with stock rigidity and long cycle time. NTK applied three geometry inserts to achieve single pass machining, in dramatically short time. The up-sharp cutting edges and low cutting pressure produced "excellent" surface finish.			

Single-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.197	Number of start	1
Major Dia.	φ.091	Helix Angle	5.3°
Minor Dia.	φ.067	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	30	Speed of whirling cutter (rpm)	3,100
Pitch = Feed (IPR)	.023	Result	OK
NTK Thread Whirling			
This thread is up to 1.26" length with a small pitch. Cycle time could be increased with a single-point threading tool. NTK's inserts, designed for lower tool pressure, ran 2,200 pcs/corner at 30 rpm of bar stock (F10,800). It only took 110 seconds to finish a 1.26" length thread.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.350	Number of start	2
Major Dia.	φ.180	Helix Angle	23.0°
Minor Dia.	φ.120	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	12	Speed of whirling cutter (rpm)	2,500
Lead = Feed (IPR)	.200	Result	OK
NTK Thread Whirling	 Dramatically improved productivity		
Competitor's Thread Whirling		Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.	
The customer could not get perfect double lead thread form in single pass from other manufacturers. NTK got perfect thread form with a single pass on first trial saving cycle time.			

Single-lead Bone Screw			
Work Material : 316SS			
Bar Stock Dia.	ϕ .315	Number of start	1
Major Dia.	ϕ .138	Helix Angle	7.5°
Minor Dia.	ϕ .098	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	23	Speed of whirling cutter (rpm)	2,000
Pitch = Feed (IPR)	.049	Result	OK
NTK Thread Whirling			
Competitor's Thread Whirling	 1000 pcs		
Some thread whirling manufacturers offer 6-teeth or 12-teeth systems, too many teeth cause chip packing issues and more tool pressure. Fewer teeth means greater cycle time. NTK concluded that 9-teeth is the best configuration. Our customers can run 1.5 times faster and get longer tool life.			

Triple-lead Worm Gear			
Work Material : Brass			
Bar Stock Dia.	φ.315	Number of start	3
Major Dia.	φ.276	Helix Angle	14.6°
Minor Dia.	φ.185	Hand of thread	Left
Cutting condition			
Main Spindle Speed (rpm)	20	Speed of whirling cutter (rpm)	3,500
Lead = Feed (IPR)	.189	Result	OK
Multi-lead threads, common in the Worm Gear industry are made by a forming or cutting process. The large helix angle is difficult to machine with single-point threading. NTK now makes thread whirling inserts for multi-lead threads. Cycle time is reduced with a one pass process and thread form dimensions are stable with the low tool pressure.			