

SBG / SFG Series

ID Grooving

SBG (for ID Grooving)

Minimum Bore Diameter .118" (3.0mm)

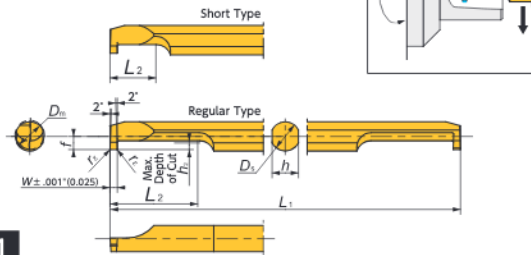


Figure-1

SFG (for ID Face Grooving)

Minimum Bore Diameter .236" (6.0mm)

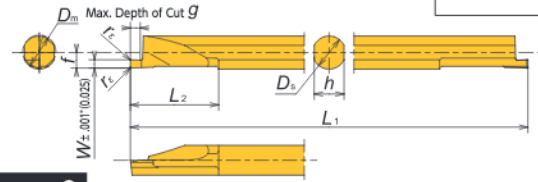


Figure-2

SBG


Item Number		Groove width W		Min Bore Dia. D_m		D_s		L_1	L_2	f	h	h_2	r_ϵ		Chip-breaker	Coated Carbide
		(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(Inch)	(mm)	ZM3		
Regular type	SBG030050RB	.020	0.50	.118	3	.118	3	50	9	1.3	2.7	0.8	.002	0.05	Yes	●
	SBG030075RB	.030	0.75	.118	3	.118	3	50	9	1.3	2.7	0.8	.002	0.05	Yes	●
	SBG030100RB	.039	1.00	.118	3	.118	3	50	9	1.3	2.7	0.8	.002	0.05	Yes	●
	SBG040050RB	.020	0.50	.157	4	.157	4	60	12	1.8	3.6	1.0	.002	0.05	Yes	●
	SBG040075RB	.030	0.75	.157	4	.157	4	60	12	1.8	3.6	1.0	.002	0.05	Yes	●
	SBG040100RB	.039	1.00	.157	4	.157	4	60	12	1.8	3.6	1.0	.002	0.05	Yes	●
	SBG050050RB	.020	0.50	.197	5	.197	5	70	20	2.3	4.5	1.2	.002	0.05	Yes	●
	SBG050100RB	.039	1.00	.197	5	.197	5	70	20	2.3	4.5	1.2	.002	0.05	Yes	●
	SBG050150RB	.059	1.50	.197	5	.197	5	70	20	2.3	4.5	1.2	.002	0.05	Yes	●
	SBG060100RB	.039	1.00	.236	6	.236	6	80	20	2.8	5.4	1.8	.002	0.05	Yes	●
	SBG060150RB	.059	1.50	.236	6	.236	6	80	20	2.8	5.4	1.8	.002	0.05	Yes	●
	SBG060200RB	.079	2.00	.236	6	.236	6	80	20	2.8	5.4	1.8	.002	0.05	Yes	●
Short type	SBG080100RB	.039	1.00	.315	8	.315	8	80	20	3.8	7.3	2.2	.002	0.05	Yes	●
	SBG080150RB	.059	1.50	.315	8	.315	8	80	20	3.8	7.3	2.2	.002	0.05	Yes	●
	SBG080200RB	.079	2.00	.315	8	.315	8	80	20	3.8	7.3	2.2	.002	0.05	Yes	●
	SBG030050RB-S	.020	0.50	.118	3	.118	3	50	4.5	1.3	2.7	0.8	.002	0.05	Yes	○
	SBG030075RB-S	.030	0.75	.118	3	.118	3	50	4.5	1.3	2.7	0.8	.002	0.05	Yes	○
	SBG030100RB-S	.039	1.00	.118	3	.118	3	50	4.5	1.3	2.7	0.8	.002	0.05	Yes	○
	SBG030150RB-S	.059	1.50	.118	3	.118	3	50	4.5	1.3	2.7	0.8	.002	0.05	Yes	○
	SBG040050RB-S	.020	0.50	.157	4	.157	4	60	6	1.8	3.6	1.0	.002	0.05	Yes	○
	SBG040075RB-S	.030	0.75	.157	4	.157	4	60	6	1.8	3.6	1.0	.002	0.05	Yes	○
	SBG040100RB-S	.039	1.00	.157	4	.157	4	60	6	1.8	3.6	1.0	.002	0.05	Yes	○
	SBG040150RB-S	.059	1.50	.157	4	.157	4	60	6	1.8	3.6	1.0	.002	0.05	Yes	○
	SBG050050RB-S	.020	0.50	.197	5	.197	5	70	7.5	2.3	4.5	1.2	.002	0.05	Yes	○
	SBG050100RB-S	.039	1.00	.197	5	.197	5	70	7.5	2.3	4.5	1.2	.002	0.05	Yes	○
	SBG050150RB-S	.059	1.50	.197	5	.197	5	70	7.5	2.3	4.5	1.2	.002	0.05	Yes	○
	SBG050200RB-S	.079	2.00	.197	5	.197	5	70	7.5	2.3	4.5	1.2	.002	0.05	Yes	○
	SBG060100RB-S	.039	1.00	.236	6	.236	6	80	7.5	2.8	5.4	1.8	.002	0.05	Yes	○
	SBG060150RB-S	.059	1.50	.236	6	.236	6	80	7.5	2.8	5.4	1.8	.002	0.05	Yes	○
	SBG060200RB-S	.079	2.00	.236	6	.236	6	80	7.5	2.8	5.4	1.8	.002	0.05	Yes	○
	SBG080100RB-S	.039	1.00	.315	8	.315	8	80	8.5	3.8	7.3	2.2	.002	0.05	Yes	○
	SBG080150RB-S	.059	1.50	.315	8	.315	8	80	8.5	3.8	7.3	2.2	.002	0.05	Yes	○
	SBG080200RB-S	.079	2.00	.315	8	.315	8	80	8.5	3.8	7.3	2.2	.002	0.05	Yes	○

SFG

Item Number	Groove width W		Min Bore Dia. D _m		D _s		L ₁	L ₂	f	h	g	r _ε		Chip-breaker	Coated Carbide
	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Inch)	(mm)		TM4
SFG060R100B	.039	1.00	.236	6	.236	6	80	16.0	2.8	5.4	1.5	.002	0.05	Yes	○
SFG060R150B	.059	1.50	.236	6	.236	6	80	16.0	2.8	5.4	2.5	.002	0.05	Yes	○
SFG060R200B	.079	2.00	.236	6	.236	6	80	16.0	2.8	5.4	3.0	.002	0.05	Yes	○
SFG080R100B	.039	1.00	.315	8	.315	8	80	16.0	3.8	7.3	1.5	.002	0.05	Yes	○
SFG080R150B	.059	1.50	.315	8	.315	8	80	16.0	3.8	7.3	2.5	.002	0.05	Yes	○
SFG080R200B	.079	2.00	.315	8	.315	8	80	16.0	3.8	7.3	3.0	.002	0.05	Yes	○
SFG080R300B	.118	3.00	.315	8	.315	8	80	16.0	3.8	7.3	3.0	.002	0.05	Yes	○

STICK DUO SPLASH

- Coolant through sleeves for ID Boring with Adjustable Overhang Mechanism -

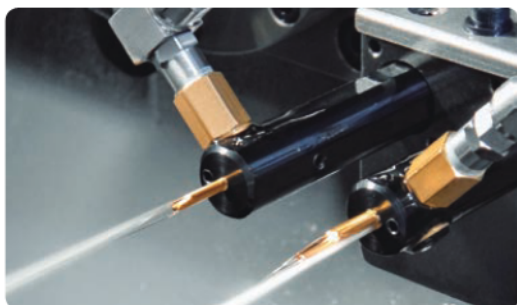


■ No chip problems

STICK DUO SPLASH	External coolant
No chip inside hole	Chip packed
Material : 4140 Insert bar : SHFS040R005S Hole depth : .590" (15mm) Pilot hole : $\phi .201" \times 1.102" L (\phi 5.1 \times 28.0 \text{ mm } L)$ Coolant Pressure : 725psi (5MPa)	

■ Choose from 2 coolant directions

I) For Blind hole	II) For Through hole
Just rotated 180 degrees	


■ 3 coolant connection options

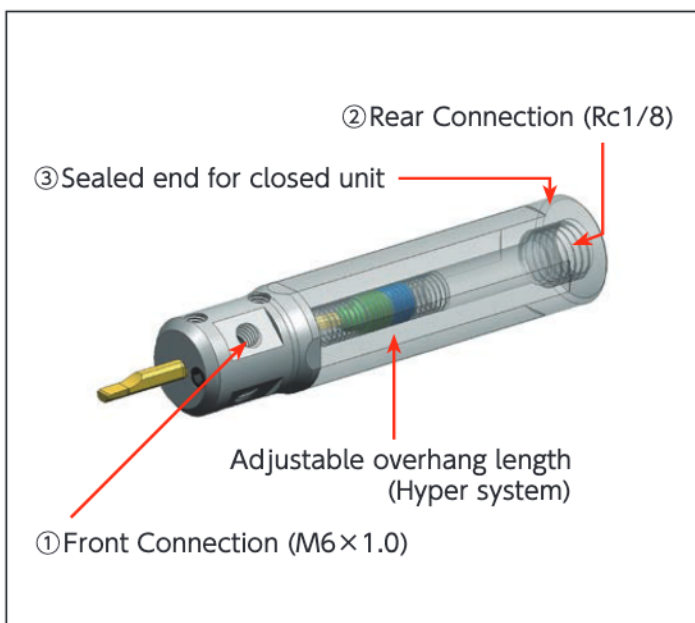

① Front Connection example



② Rear Connection example

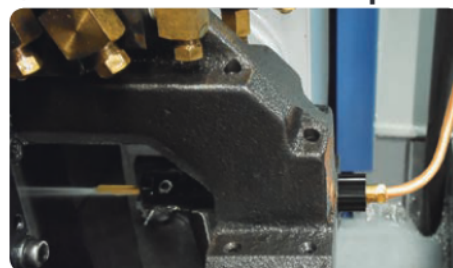

STICK DUO SPLASH - Stick Duo Hyper with Coolant through -

HY-NBH-OH (Coolant through)

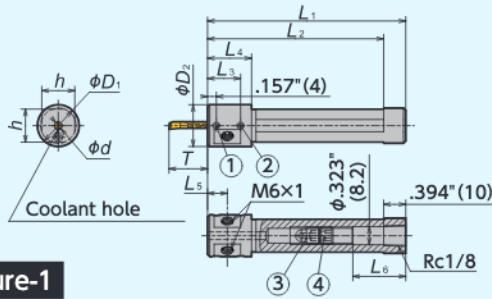


Figure-1

HY-NBH-OH (Coolant through)

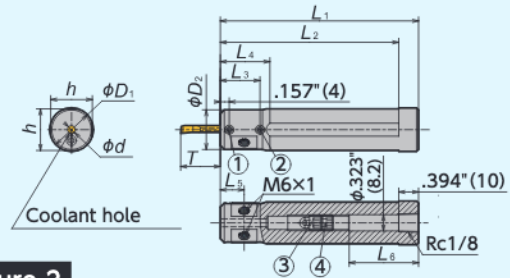


Figure-2

Item Number	Stock	Figure	ϕd		ϕD_1		ϕD_2	h	L_1	L_2	L_3	L_4	L_5	L_6	Overhang Length of Bar T			
			(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	Min.	(mm)	Max.	(mm)
HY-NBH02016G-OH	●	1	.079	2.0	.630	16.0	19	15	90	80	15	19	9.5	29	.197	5.0	.709	18.0
HY-NBH02516G-OH	●	1	.098	2.5	.630	16.0	19	15	90	80	15	19	9.5	30	.248	6.3	.768	19.5
HY-NBH03016G-OH	●	1	.118	3.0	.630	16.0	19	15	90	80	15	19	9.5	31	.295	7.5	.827	21.0
HY-NBH03516G-OH	●	1	.138	3.5	.630	16.0	19	15	90	80	15	19	9.5	23	.346	8.8	.965	24.5
HY-NBH04016G-OH	●	1	.157	4.0	.630	16.0	19	15	90	80	20	24	12	23	.394	10.0	1.102	28.0
HY-NBH05016G-OH	●	1	.197	5.0	.630	16.0	19	15	90	80	20	24	12	16	.492	12.5	1.378	35.0
HY-NBH02019J-OH	●	2	.079	2.0	3/4	19.05	19.05	18	110	100	15	—	9.5	49	.197	5.0	.709	18.0
HY-NBH02519J-OH	●	2	.098	2.5	3/4	19.05	19.05	18	110	100	15	—	9.5	50	.248	6.3	.768	19.5
HY-NBH03019J-OH	●	2	.118	3.0	3/4	19.05	19.05	18	110	100	15	—	9.5	51	.295	7.5	.827	21.0
HY-NBH03519J-OH	●	2	.138	3.5	3/4	19.05	19.05	18	110	100	15	—	9.5	43	.346	8.8	.965	24.5
HY-NBH04019J-OH	●	2	.157	4.0	3/4	19.05	19.05	18	110	100	20	—	12	43	.394	10.0	1.102	28.0
HY-NBH05019J-OH	●	2	.197	5.0	3/4	19.05	19.05	18	110	100	20	—	12	36	.492	12.5	1.378	35.0
HY-NBH06019J-OH	●	2	.236	6.0	3/4	19.05	19.05	18	110	100	20	—	12	28.5	.591	15.0	1.654	42.0
HY-NBH02020J-OH	●	2	.079	2.0	.787	20.0	20	19	110	100	15	—	9.5	49	.197	5.0	.709	18.0
HY-NBH02520J-OH	●	2	.098	2.5	.787	20.0	20	19	110	100	15	—	9.5	50	.248	6.3	.768	19.5
HY-NBH03020J-OH	●	2	.118	3.0	.787	20.0	20	19	110	100	15	—	9.5	51	.295	7.5	.827	21.0
HY-NBH03520J-OH	●	2	.138	3.5	.787	20.0	20	19	110	100	15	—	9.5	43	.346	8.8	.965	24.5
HY-NBH04020J-OH	●	2	.157	4.0	.787	20.0	20	19	110	100	20	—	12	43	.394	10.0	1.102	28.0
HY-NBH05020J-OH	●	2	.197	5.0	.787	20.0	20	19	110	100	20	—	12	36	.492	12.5	1.378	35.0
HY-NBH06020J-OH	●	2	.236	6.0	.787	20.0	20	19	110	100	20	—	12	28.5	.591	15.0	1.654	42.0
HY-NBH02022X-OH	●	2	.079	2.0	.866	22.0	20	21	120	110	15	25	9.5	59	.197	5.0	.709	18.0
HY-NBH02522X-OH	●	2	.098	2.5	.866	22.0	20	21	120	110	15	25	9.5	60	.248	6.3	.768	19.5
HY-NBH03022X-OH	●	2	.118	3.0	.866	22.0	20	21	120	110	15	25	9.5	61	.295	7.5	.827	21.0
HY-NBH03522X-OH	●	2	.138	3.5	.866	22.0	20	21	120	110	15	25	9.5	53	.346	8.8	.965	24.5
HY-NBH04022X-OH	●	2	.157	4.0	.866	22.0	20	21	120	110	20	25	12	53	.394	10.0	1.102	28.0
HY-NBH05022X-OH	●	2	.197	5.0	.866	22.0	20	21	120	110	20	25	12	46	.492	12.5	1.378	35.0
HY-NBH06022X-OH	●	2	.236	6.0	.866	22.0	20	21	120	110	20	25	12	28.5	.591	15.0	1.654	42.0
HY-NBH02025.0K-OH	●	2	.079	2.0	.984	25.0	20	24	125	115	15	25	9.5	64	.197	5.0	.709	18.0
HY-NBH02525.0K-OH	●	2	.098	2.5	.984	25.0	20	24	125	115	15	25	9.5	65	.248	6.3	.768	19.5
HY-NBH03025.0K-OH	●	2	.118	3.0	.984	25.0	20	24	125	115	15	25	9.5	66	.295	7.5	.827	21.0
HY-NBH03525.0K-OH	●	2	.138	3.5	.984	25.0	20	24	125	115	15	25	9.5	58	.346	8.8	.965	24.5
HY-NBH04025.0K-OH	●	2	.157	4.0	.984	25.0	20	24	125	115	20	25	12	58	.394	10.0	1.102	28.0
HY-NBH05025.0K-OH	●	2	.197	5.0	.984	25.0	20	24	125	115	20	25	12	51	.492	12.5	1.378	35.0
HY-NBH06025.0K-OH	●	2	.236	6.0	.984	25.0	20	24	125	115	20	25	12	28.5	.591	15.0	1.654	42.0
HY-NBH02025.4K-OH	●	2	.079	2.0	1.000	25.4	20	24	125	115	15	25	9.5	64	.197	5.0	.709	18.0
HY-NBH02525.4K-OH	●	2	.098	2.5	1.000	25.4	20	24	125	115	15	25	9.5	65	.248	6.3	.768	19.5
HY-NBH03025.4K-OH	●	2	.118	3.0	1.000	25.4	20	24	125	115	15	25	9.5	66	.295	7.5	.827	21.0
HY-NBH03525.4K-OH	●	2	.138	3.5	1.000	25.4	20	24	125	115	15	25	9.5	58	.346	8.8	.965	24.5
HY-NBH04025.4K-OH	●	2	.157	4.0	1.000	25.4	20	24	125	115	20	25	12	58	.394	10.0	1.102	28.0
HY-NBH05025.4K-OH	●	2	.197	5.0	1.000	25.4	20	24	125	115	20	25	12	51	.492	12.5	1.378	35.0
HY-NBH06025.4K-OH	●	2	.236	6.0	1.000	25.4	20	24	125	115	20	25	12	28.5	.591	15.0	1.654	42.0

Parts for STICK DUO SPLASH


Item Number	Clamp Screw		Overhang Adjustment		
	①	②	③	④	⑤
HY-NBH ... -OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F
	M6 Screw		Wrench		
	⑥		for ①②	for ③④⑤	for ⑥
	SS0605SC		LW-2	LW-4×104	LW-3

STICK DUO HYPER


- Sleeves for ID Boring with Adjustable Overhang Mechanism -



Can Index boring bars like inserts

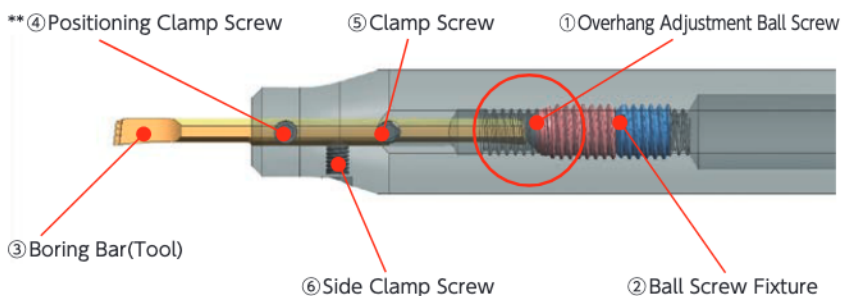

Installation Procedure for STICK DUO Hyper

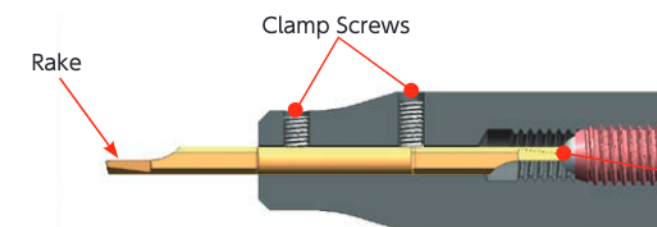

Caution: Improper installation dramatically increases the chance of chipping cutting edge



Improper clamping of boring bar causes unstable centerline height and offset

① Position the overhang adjustment ball screw to determine overhang amount

② Slide the ball screw fixture to secure the ball screw location

③ Insert a boring bar (tool)

Note: Make sure to insert the boring bar correctly so that the rake face is toward the side where the clamp screws are located

④ Secure the boring bar by tightening the positioning clamp screw ▶ Recommended Clamping Torque: 17.7 lb in


** Make sure to clamp the boring bar so that the flat surface of the bar makes proper contact with clamp screws

⑤ Secure the boring bar by tightening the remaining clamp screws ▶ Recommended Clamping Torque: 17.7 lb in

⑥ Even if 4 and 5 cannot be performed due to tool clearance and layout, the tool can be used by only securing the side clamp screw

Once the initial setup is complete, repeat the above procedures 3 thru 5 for each index


When the tool is installed upside down

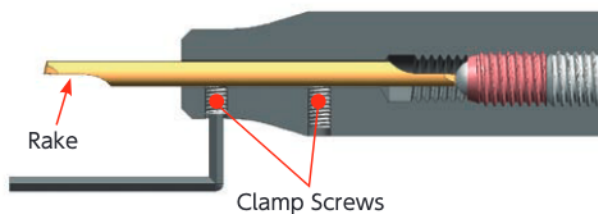

Toolholder must be installed so that clamp screws and rake of the tool face toward the same side

STICK DUO HYPER

HY-NBH

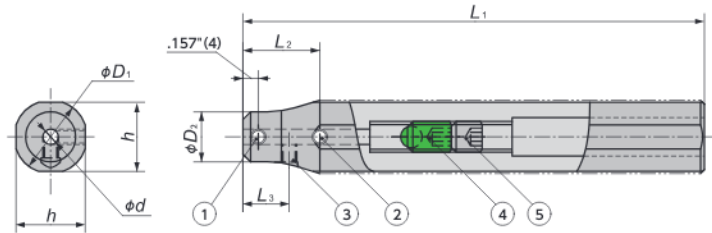

Please refer to ϕd to find correct-size inserts (bars)

Item Number	Stock	ϕd		ϕD_1		ϕD_2	h	L_1	L_2	L_3	Clamp Screws		
		(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	①	②	③
HY-NBH02016H	○	.079	2.0	.630	16.0	11	15	100	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02516H	○	.098	2.5	.630	16.0	11.5	15	100	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03016H	○	.118	3.0	.630	16.0	12	15	100	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03516H	○	.138	3.5	.630	16.0	12.5	15	100	20	12	SS04045FS	SS0404F	SS0404F
HY-NBH04016H	○	.157	4.0	.630	16.0	13	15	100	20	12	SS04045FS	SS0404F	SS0404F
HY-NBH05016H	○	.197	5.0	.630	16.0	14	15	100	20	12	SS04045FS	SS0404F	SS0404F
HY-NBH02019K	●	.079	2.0	3/4	19.05	11	18	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02519K	●	.098	2.5	3/4	19.05	11.5	18	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03019K	●	.118	3.0	3/4	19.05	12	18	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03519K	●	.138	3.5	3/4	19.05	12.5	18	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH04019K	●	.157	4.0	3/4	19.05	13	18	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH05019K	●	.197	5.0	3/4	19.05	14	18	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH02020K	○	.079	2.0	.787	20.0	11	19	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02520K	○	.098	2.5	.787	20.0	11.5	19	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03020K	○	.118	3.0	.787	20.0	12	19	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03520K	○	.138	3.5	.787	20.0	12.5	19	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH04020K	○	.157	4.0	.787	20.0	13	19	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH05020K	○	.197	5.0	.787	20.0	14	19	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH02022K	●	.079	2.0	.866	22.0	11	21	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02522K	●	.098	2.5	.866	22.0	11.5	21	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03022K	●	.118	3.0	.866	22.0	12	21	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03522K	●	.138	3.5	.866	22.0	12.5	21	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH04022K	●	.157	4.0	.866	22.0	13	21	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH05022K	●	.197	5.0	.866	22.0	14	21	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH02025K-MET	○	.079	2.0	.984	25.0	11	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02525K-MET	○	.098	2.5	.984	25.0	11.5	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03025K-MET	○	.118	3.0	.984	25.0	12	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03525K-MET	○	.138	3.5	.984	25.0	12.5	24	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH04025K-MET	○	.157	4.0	.984	25.0	13	24	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH05025K-MET	○	.197	5.0	.984	25.0	14	24	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH02025K	●	.079	2.0	1.000	25.4	11	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH02525K	●	.098	2.5	1.000	25.4	11.5	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03025K	●	.118	3.0	1.000	25.4	12	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
HY-NBH03525K	●	.138	3.5	1.000	25.4	12.5	24	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH04025K	●	.157	4.0	1.000	25.4	13	24	125	20	12	SS04045FS	SS0406F	SS0404F
HY-NBH05025K	●	.197	5.0	1.000	25.4	14	24	125	20	12	SS04045FS	SS0406F	SS0404F

Spare Parts

Item Number	Overhang Adjustment		Wrench	
	④	⑤	for ①②③	for ④⑤
HY-NBH ... K	SS0812R	SS0808F	LW-2	LW-4×104

Insert bars → V12

● : Stock
● : Stock (Newly added)
■ □ R L : While stocks last

R L : Stock (Right / Left-hand only)
R L : Stock (Right / Left-hand only, Newly added)
M : Mirror finish

○ : 1-2 week delivery
○ : 1-2 week delivery (Newly added)
● : Coolant through

Ⓡ Ⓛ : 1-2 week delivery (Right / Left-hand only)
Ⓡ Ⓛ : 1-2 week delivery (Right / Left-hand only, Newly added)

STICK DUO - Sleeves for ID machining -

NBH

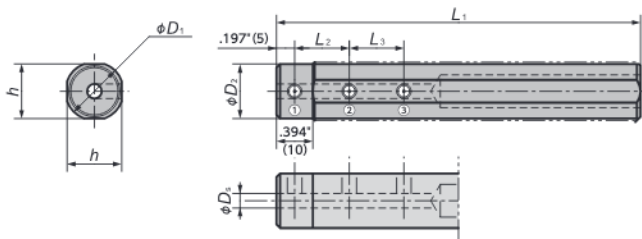


Figure-1

NBH

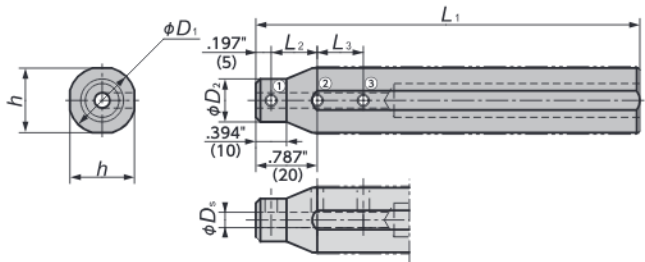


Figure-2

Item number	Figure	Stock	ϕD_s		ϕD_1		ϕD_2	h	L_1	L_2	L_3	Clamp screw			Wrench
			(Inch)	(mm)	(Inch)	(mm)						①	②	③	
NBH02015H	1	○	.079	2.0	5/8	15.875	15	15	100	10	—	SS0406F	SS0406F	—	LW-2
NBH02515H	1	○	.098	2.5	5/8	15.875	15	15	100	10	—	SS0406F	SS0406F	—	LW-2
NBH03015H	1	○	.118	3.0	5/8	15.875	15	15	100	10	10	SS0404F	SS0404F	SS0404F	LW-2
NBH03515H	1	○	.138	3.5	5/8	15.875	15	15	100	10	10	SS0404F	SS0404F	SS0404F	LW-2
NBH04015H	1	○	.157	4.0	5/8	15.875	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH04515H	1	○	.177	4.5	5/8	15.875	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH05015H	1	○	.197	5.0	5/8	15.875	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH06015H	1	○	.236	6.0	5/8	15.875	15	15	100	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH08015H	1	○	.315	8.0	5/8	15.875	15	15	100	20	20	SS0403F	SS0403F	SS0403F	LW-2
NBH02016H	1	○	.079	2.0	.630	16.0	15	15	100	10	—	SS0406F	SS0406F	—	LW-2
NBH02516H	1	○	.098	2.5	.630	16.0	15	15	100	10	—	SS0406F	SS0406F	—	LW-2
NBH03016H	1	○	.118	3.0	.630	16.0	15	15	100	10	10	SS0404F	SS0404F	SS0404F	LW-2
NBH03516H	1	○	.138	3.5	.630	16.0	15	15	100	10	10	SS0404F	SS0404F	SS0404F	LW-2
NBH04016H	1	○	.157	4.0	.630	16.0	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH04516H	1	○	.177	4.5	.630	16.0	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH05016H	1	○	.197	5.0	.630	16.0	15	15	100	15	15	SS0404F	SS0404F	SS0404F	LW-2
NBH06016H	1	●	.236	6.0	.630	16.0	15	15	100	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH07016H	1	○	.276	7.0	.630	16.0	15	15	100	20	20	SS0403F	SS0404F	SS0404F	LW-2
NBH08016H	1	●	.315	8.0	.630	16.0	15	15	100	20	20	SS0403F	SS0403F	SS0403F	LW-2
NBH02019K	1	○	.079	2.0	3/4	19.05	18	18	125	10	—	SS0408F	SS0408F	—	LW-2
NBH02519K	1	○	.098	2.5	3/4	19.05	18	18	125	10	—	SS0408F	SS0408F	—	LW-2
NBH03019K	1	○	.118	3.0	3/4	19.05	18	18	125	10	10	SS0406F	SS0406F	SS0406F	LW-2
NBH03519K	1	○	.138	3.5	3/4	19.05	18	18	125	10	10	SS0406F	SS0406F	SS0406F	LW-2
NBH04019K	1	○	.157	4.0	3/4	19.05	18	18	125	15	15	SS0406F	SS0406F	SS0406F	LW-2
NBH04519K	1	○	.177	4.5	3/4	19.05	18	18	125	15	15	SS0406F	SS0406F	SS0406F	LW-2
NBH05019K	1	○	.197	5.0	3/4	19.05	18	18	125	15	15	SS0406F	SS0406F	SS0406F	LW-2
NBH06019K	1	●	.236	6.0	3/4	19.05	18	18	125	20	20	SS0406F	SS0406F	SS0406F	LW-2
NBH07019K	1	○	.276	7.0	3/4	19.05	18	18	125	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH08019K	1	●	.315	8.0	3/4	19.05	18	18	125	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH10019K	1	○	.394	10.0	3/4	19.05	18	18	125	20	20	SS0403F	SS0404F	SS0404F	LW-2
NBH02020K	2	○	.079	2.0	.787	20.0	11	19	125	10	—	SS0404F	SS0404F	—	LW-2
NBH02520K	2	○	.098	2.5	.787	20.0	11	19	125	10	—	SS0404F	SS0404F	—	LW-2
NBH03020K	2	○	.118	3.0	.787	20.0	12	19	125	10	10	SS0404F	SS0404F	SS0406F	LW-2
NBH03520K	2	○	.138	3.5	.787	20.0	12	19	125	10	10	SS0404F	SS0404F	SS0406F	LW-2
NBH04020K	2	○	.157	4.0	.787	20.0	13	19	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH04520K	2	○	.177	4.5	.787	20.0	13	19	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH05020K	2	○	.197	5.0	.787	20.0	14	19	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH06020K	2	●	.236	6.0	.787	20.0	15	19	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH07020K	2	○	.276	7.0	.787	20.0	16	19	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH08020K	2	●	.315	8.0	.787	20.0	17	19	125	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH10020K	2	○	.394	10.0	.787	20.0	19	19	125	20	20	SS0404F	SS0404F	SS0404F	LW-2

Item number	Figure	Stock	ϕD_s		ϕD_1		ϕD_2	h_1	L_1	L_2	L_3	Clamp screw			Wrench
			(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	①	②	③	
NBH02022K	2	○	.079	2.0	.866	22.0	11	21	125	10	—	SS0404F	SS0406F	—	LW-2
NBH02522K	2	○	.098	2.5	.866	22.0	11	21	125	10	—	SS0404F	SS0406F	—	LW-2
NBH03022K	2	○	.118	3.0	.866	22.0	12	21	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH03522K	2	○	.138	3.5	.866	22.0	12	21	125	10	10	SS0404F	SS0406F	SS0406F	LW-2
NBH04022K	2	○	.157	4.0	.866	22.0	13	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH04522K	2	○	.177	4.5	.866	22.0	13	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH05022K	2	○	.197	5.0	.866	22.0	14	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH06022K	2	●	.236	6.0	.866	22.0	15	21	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH07022K	2	○	.276	7.0	.866	22.0	16	21	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH08022K	2	●	.315	8.0	.866	22.0	17	21	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH10022K	2	○	.394	10.0	.866	22.0	19	21	125	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH12022K	2	○	.472	12.0	.866	22.0	21	21	125	25	25	SS0404F	SS0404F	SS0404F	LW-2
NBH02023K	2	○	.079	2.0	.906	23.0	11	21	125	10	—	SS0404F	SS0406F	—	LW-2
NBH02523K	2	○	.098	2.5	.906	23.0	11	21	125	10	—	SS0404F	SS0406F	—	LW-2
NBH03023K	2	○	.118	3.0	.906	23.0	12	21	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH03523K	2	○	.138	3.5	.906	23.0	12	21	125	10	10	SS0404F	SS0406F	SS0406F	LW-2
NBH04023K	2	○	.157	4.0	.906	23.0	13	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH04523K	2	○	.177	4.5	.906	23.0	13	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH05023K	2	○	.197	5.0	.906	23.0	14	21	125	15	15	SS0404F	SS0406F	SS0406F	LW-2
NBH06023K	2	○	.236	6.0	.906	23.0	15	21	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH08023K	2	○	.315	8.0	.906	23.0	17	21	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH10023K	2	○	.394	10.0	.906	23.0	19	21	125	20	20	SS0404F	SS0404F	SS0404F	LW-2
NBH12023K	2	○	.472	12.0	.906	23.0	21	21	125	25	25	SS0404F	SS0404F	SS0404F	LW-2
NBH02025K-MET	2	○	.079	2.0	.984	25.0	11	24	125	10	—	SS0404F	SS0406F	—	LW-2
NBH02525K-MET	2	○	.098	2.5	.984	25.0	11	24	125	10	—	SS0404F	SS0406F	—	LW-2
NBH03025K-MET	2	○	.118	3.0	.984	25.0	12	24	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH03525K-MET	2	○	.138	3.5	.984	25.0	12	24	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH04025K-MET	2	○	.157	4.0	.984	25.0	13	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH04525K-MET	2	○	.177	4.5	.984	25.0	13	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH05025K-MET	2	○	.197	5.0	.984	25.0	14	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH06025K-MET	2	●	.236	6.0	.984	25.0	15	24	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH07025K-MET	2	○	.276	7.0	.984	25.0	16	24	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH08025K-MET	2	●	.315	8.0	.984	25.0	17	24	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH10025K-MET	2	○	.394	10.0	.984	25.0	19	24	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH12025K-MET	2	○	.472	12.0	.984	25.0	21	24	125	25	25	SS0404F	SS0404F	SS0404F	LW-2
NBH02025K	2	○	.079	2.0	1.000	25.4	11	24	125	10	—	SS0404F	SS0406F	—	LW-2
NBH02525K	2	○	.098	2.5	1.000	25.4	11	24	125	10	—	SS0404F	SS0406F	—	LW-2
NBH03025K	2	○	.118	3.0	1.000	25.4	12	24	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH03525K	2	○	.138	3.5	1.000	25.4	12	24	125	10	10	SS0404F	SS0406F	SS0408F	LW-2
NBH04025K	2	○	.157	4.0	1.000	25.4	13	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH04525K	2	○	.177	4.5	1.000	25.4	13	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH05025K	2	○	.197	5.0	1.000	25.4	14	24	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH06025K	2	●	.236	6.0	1.000	25.4	15	24	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH07025K	2	○	.276	7.0	1.000	25.4	16	24	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH08025K	2	●	.315	8.0	1.000	25.4	17	24	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH10025K	2	○	.394	10.0	1.000	25.4	19	24	125	20	20	SS0404F	SS0406F	SS0406F	LW-2
NBH12025K	2	○	.472	12.0	1.000	25.4	21	24	125	25	25	SS0404F	SS0404F	SS0404F	LW-2
NBH04532K	2	○	.177	4.5	1.260	32.0	13	30	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH05032K	2	○	.197	5.0	1.260	32.0	14	30	125	15	15	SS0404F	SS0408F	SS0408F	LW-2
NBH06032K	2	○	.236	6.0	1.260	32.0	15	30	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH07032K	2	○	.276	7.0	1.260	32.0	16	30	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH08032K	2	○	.315	8.0	1.260	32.0	17	30	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH10032K	2	○	.394	10.0	1.260	32.0	19	30	125	20	20	SS0404F	SS0408F	SS0408F	LW-2
NBH12032K	2	○	.472	12.0	1.260	32.0	21	30	125	25	25	SS0404F	SS0406F	SS0406F	LW-2
NBH14032K	2	○	.551	14.0	1.260	32.0	23	30	125	25	25	SS0504	SS0506	SS0506	LW-2.5
NBH16032K	2	○	.630	16.0	1.260	32.0	25	30	125	25	25	SS0504	SS0506	SS0506	LW-2.5

● : Stock
● : Stock (Newly added)
■ □ R L : While stocks last

R L : Stock (Right / Left-hand only)
R L : Stock (Right / Left-hand only, Newly added)
M : Mirror finish

○ : 1-2 week delivery
○ : 1-2 week delivery (Newly added)
● : Coolant through

Ⓡ L : 1-2 week delivery (Right / Left-hand only)
Ⓡ L : 1-2 week delivery (Right / Left-hand only, Newly added)

Insert bars **➔V16**