


OD Grooving

GTPS.. series/Toolholder

CTPS

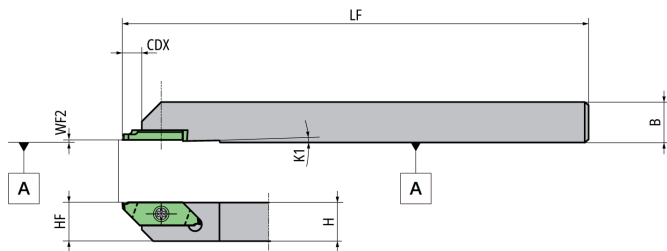

● Diagram shows right-hand tool




EDP	Item Number	Stock	Hand	B mm	CDX mm	H mm	HF mm	K1 °	LF mm	WF2 mm	Insert Gage	
5346572	CTPSR10	●	R	10	5	10	10	1	120	0	TBPS../CTPS..	GTPS../TTPS..
5397187	CTPSR12	●	R	12	5	12	12	1	120	0	TBPS../CTPS..	GTPS../TTPS..

Spare Parts

Item Number	Clamp screw	Wrench (for Clamp screw)
CTPSR10	LRIS-2.5*7	CLR-155
CTPSR12	LRIS-2.5*7	CLR-155


GTPS.. series/Inserts Carbide

GTPS




● Diagram shows right-hand tool

All angles shown are obtained when insert is set in the holder.



Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	INSL	REL	RER	S	W1	Carbide PVD	
			mm	mm	mm	°	mm	mm	mm	mm	mm	VM1	ZM3
GTPS075FR	R	Yes	1	1.5	0.75	45	20	0	0	2.5	6	●	●
GTPS095FR	R	Yes	1.5	2	0.95	45	20	0	0	2.5	6	●	●
GTPS100FR	R	Yes	1.5	2	1	45	20	0	0	2.5	6	●	●
GTPS120FR	R	Yes	2.5	3	1.2	45	20	0	0	2.5	6	●	●
GTPS150FR	R	Yes	2.5	3	1.5	45	20	0	0	2.5	6	●	●
GTPS200FR	R	Yes	2.5	3	2	45	20	0	0	2.5	6	●	●



GTMH32-E



● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	GAN	IC	K8	REL	RER	S	Carbide
			mm	mm	mm	°	°	mm	°	mm	mm	mm	PVD ZM3
GTMH32033RE	R	Yes	0.3	0.6	0.33	60	20	9.525	2	0.03	0.03	3.18	●
GTMH32043RE	R	Yes	0.9	1.2	0.43	60	20	9.525	2	0.03	0.03	3.18	●
GTMH32053RE	R	Yes	0.9	1.2	0.53	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32075RE	R	Yes	1.6	2	0.75	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32077RE	R	Yes	1.6	2	0.77	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32095RE	R	Yes	1.6	2	0.95	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32097RE	R	Yes	1.6	2	0.97	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32100RE	R	Yes	1.6	2	1	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32103RE	R	Yes	1.6	2	1.03	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32120RE	R	Yes	1.6	2	1.2	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32125RE	R	Yes	1.6	2	1.25	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32140RE	R	Yes	1.6	2	1.4	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32145RE	R	Yes	2.7	3	1.45	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32150RE	R	Yes	2.7	3	1.5	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32175RE	R	Yes	2.7	3	1.75	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32180RE	R	Yes	2.7	3	1.8	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32200RE	R	Yes	2.7	3	2	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32225RE	R	Yes	2.7	3	2.25	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32250RE	R	Yes	2.7	3	2.5	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32275RE	R	Yes	2.7	3	2.75	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32300RE	R	Yes	2.7	3	3	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32100RE01	R	Yes	1.6	2	1	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32120RE01	R	Yes	1.6	2	1.2	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32150RE01	R	Yes	2.7	3	1.5	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32200RE01	R	Yes	2.7	3	2	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32033LE	L	Yes	0.3	0.6	0.33	60	20	9.525	2	0.03	0.03	3.18	●
GTMH32043LE	L	Yes	0.9	1.2	0.43	60	20	9.525	2	0.03	0.03	3.18	●
GTMH32053LE	L	Yes	0.9	1.2	0.53	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32075LE	L	Yes	1.6	2	0.75	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32077LE	L	Yes	1.6	2	0.77	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32095LE	L	Yes	1.6	2	0.95	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32097LE	L	Yes	1.6	2	0.97	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32100LE	L	Yes	1.6	2	1	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32103LE	L	Yes	1.6	2	1.03	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32120LE	L	Yes	1.6	2	1.2	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32140LE	L	Yes	1.6	2	1.4	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32150LE	L	Yes	2.7	3	1.5	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32180LE	L	Yes	2.7	3	1.8	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32200LE	L	Yes	2.7	3	2	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32225LE	L	Yes	2.7	3	2.25	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32250LE	L	Yes	2.7	3	2.5	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32275LE	L	Yes	2.7	3	2.75	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32300LE	L	Yes	2.7	3	3	60	20	9.525	2	0.05	0.05	3.18	●
GTMH32100LE01	L	Yes	1.6	2	1	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32120LE01	L	Yes	1.6	2	1.2	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32150LE01	L	Yes	2.7	3	1.5	60	20	9.525	2	0.1	0.1	3.18	●
GTMH32200LE01	L	Yes	2.7	3	2	60	20	9.525	2	0.1	0.1	3.18	●



GTMH32-SSH Short type / Flat top chipbreaker



● Diagram shows right-hand tool

Item Number		Hand	Chip-breaker	APMX mm	CDX mm	CW mm	EPSR °	GAN °	IC mm	K8 °	LBB mm	REL mm	RER mm	S mm	Carbide KM1
GTMH32100RSSH		R	Yes	1.6	2	1	60	0	9.525	2	1.5	0.05	0.05	3.18	●
GTMH32150RSSH		R	Yes	2.7	3	1.5	60	0	9.525	2	1.5	0.05	0.05	3.18	●
GTMH32200RSSH		R	Yes	2.7	3	2	60	0	9.525	2	1.5	0.05	0.05	3.18	●



■ GTMX32-SS Short type / Flat top chipbreaker



● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	GAN	IC	K8	LBB	REL	RER	S	Carbide PVD ZM3
			mm	mm	mm	°	°	mm	°	mm	mm	mm	mm	
GTMX32100RSS	R	Yes	1.6	2	1	60	0	9.525	2	1.5	0.05	0.05	3.18	●
GTMX32150RSS	R	Yes	2.7	3	1.5	60	0	9.525	2	1.5	0.05	0.05	3.18	●
GTMX32200RSS	R	Yes	2.7	3	2	60	0	9.525	2	1.5	0.05	0.05	3.18	●



■ GTMX32-LS Long type / Flat top chipbreaker



● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	GAN	IC	K8	LBB	REL	RER	S	Carbide PVD ZM3
			mm	mm	mm	°	°	mm	°	mm	mm	mm	mm	
GTMX32100RLS	R	Yes	1.6	2	1	60	0	9.525	2	3	0.05	0.05	3.18	●
GTMX32150RLS	R	Yes	2.7	3	1.5	60	0	9.525	2	3	0.05	0.05	3.18	●
GTMX32200RLS	R	Yes	2.7	3	2	60	0	9.525	2	3	0.05	0.05	3.18	●


■ GTMH32-VT Side Turning



● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	GAN	IC	K8	REL	RER	S	Carbide PVD VM1
			mm	mm	mm	°	°	mm	°	mm	mm	mm	
GTMH32033RVT	R	Yes	0.25	0.6	0.33	60	14	9.525	2	0	0	3.18	●
GTMH32043RVT	R	Yes	0.9	1.2	0.43	60	14	9.525	2	0	0	3.18	●
GTMH32053RVT	R	Yes	1.6	2	0.53	60	14	9.525	2	0	0	3.18	●
GTMH32065RVT	R	Yes	1.6	2	0.65	60	14	9.525	2	0	0	3.18	●
GTMH32075RVT	R	Yes	1.6	2	0.75	60	14	9.525	2	0	0	3.18	●
GTMH32080RVT	R	Yes	1.6	2	0.8	60	14	9.525	2	0	0	3.18	●
GTMH32085RVT	R	Yes	1.6	2	0.85	60	14	9.525	2	0	0	3.18	●
GTMH32095RVT	R	Yes	1.6	2	0.95	60	14	9.525	2	0	0	3.18	●
GTMH32100RVT	R	Yes	1.6	2	1	60	14	9.525	2	0	0	3.18	●
GTMH32110RVT	R	Yes	1.6	2	1.1	60	14	9.525	2	0	0	3.18	●
GTMH32120RVT	R	Yes	1.6	2	1.2	60	14	9.525	2	0	0	3.18	●
GTMH32130RVT	R	Yes	1.6	2	1.3	60	14	9.525	2	0	0	3.18	●
GTMH32140RVT	R	Yes	1.6	2	1.4	60	14	9.525	2	0	0	3.18	●
GTMH32150RVT	R	Yes	2.7	3	1.5	60	14	9.525	2	0	0	3.18	●
GTMH32200RVT	R	Yes	2.7	3	2	60	14	9.525	2	0	0	3.18	●



GTMH32 Full radius style



● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	GAN	IC	RE	S	Carbide PVD ZM3
			mm	mm	mm	°	°	mm	mm	mm	
GTMH32050RE025	R	Yes	0.9	1.2	0.5	60	20	9.525	0.25	3.18	●
GTMH32070RE035	R	Yes	1.6	2	0.7	60	20	9.525	0.35	3.18	●
GTMH32100RE05	R	Yes	1.6	2	1	60	20	9.525	0.5	3.18	●
GTMH32150RE075	R	Yes	2.7	3	1.5	60	20	9.525	0.75	3.18	●
GTMH32200RE10	R	Yes	2.7	3	2	60	20	9.525	1	3.18	●
GTMH32250RE125	R	Yes	2.7	3	2.5	60	20	9.525	1.25	3.18	●
GTMH32300RE15	R	Yes	2.7	3	3	60	20	9.525	1.5	3.18	●

GTMX32-V90 90 Degree V-style



● Diagram shows right-hand tool



Item Number	Hand	Chip-breaker	APMX	EPSR	GAN	IC	PDX	PNA	RE	S	Carbide PVD TM4
			mm	°	°	mm	mm	°	mm	mm	
GTMX32V90R005	R	Yes	0.35	60	20	9.525	0.5	90	0.05	3.18	●
GTMX32V90R010	R	Yes	0.7	60	20	9.525	1	90	0.1	3.18	●

T Grooving/
Side-Turning

OD Grooving

GTMT(A)43.. series/Toolholder

NGTN

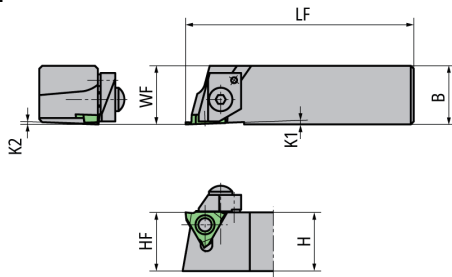



● Diagram shows right-hand tool

EDP	Item Number	Stock	Hand	B mm	CDX mm	CW mm	H mm	HF mm	K1 °	K2 °	LF mm	WF mm	Insert Gage
5501994	NGTNR161643-20	●	R	16	4.5	2-5.5	16	16	2	2	78	16	GT..43..
5534136	NGTNR161643-35	●	R	16	4.5	3.5-5.5	16	16	2	2	78	16	GT..43..
5554241	NGTNL161643-20	●	L	16	4.5	2-5.5	16	16	2	2	78	16	GT..43..
5222112	NGTNL161643-35	●	L	16	4.5	3.5-5.5	16	16	2	2	78	16	GT..43..

Spare Parts

Item Number	Clamp	Clamp screw	Spring	Wrench (for Clamp screw)
NGTNR161643-20	CPR5S	AOS-5*25	ASG-5	LW-2.5
NGTNR161643-35	CPR5S	AOS-5*25	ASG-5	LW-2.5
NGTNL161643-20	CPL5S	AOS-5*25	ASG-5	LW-2.5
NGTNL161643-35	CPL5S	AOS-5*25	ASG-5	LW-2.5

NGTB

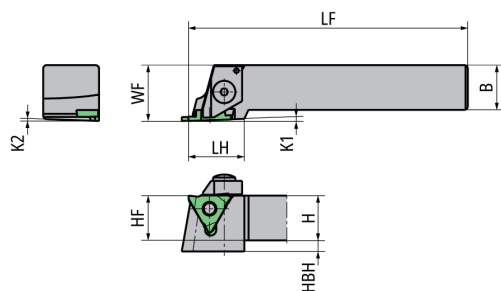


● Diagram shows right-hand tool

EDP	Item Number	Stock	Hand	B mm	CDX mm	CW mm	H mm	HBH mm	HF mm	K1 °	K2 °	LF mm	LH mm	WF mm	Insert Gage
5239900	NGTBR161643-00S	●	R	16	3	1-5.5	16	9	16	2	2	100	25	20	GT..43..
5949615	NGTBR161643-20S	●	R	16	4.5	2-5.5	16	9	16	2	2	100	25	20	GT..43..
5806096	NGTBR161643-35S	●	R	16	4.5	3.5-5.5	16	9	16	2	2	100	25	20	GT..43..
5239850	NGTBR202043-00S	●	R	20	3	1-5.5	20	5	20	2	2	125	25	25	GT..43..
5550041	NGTBR202043-20S	●	R	20	4.5	2-5.5	20	5	20	2	2	125	25	25	GT..43..
5553375	NGTBR202043-35S	●	R	20	4.5	3.5-5.5	20	5	20	2	2	125	25	25	GT..43..
5239876	NGTBR252543-00S	●	R	25	3.5	1-5.5	25	-	25	2	2	150	25	30	GT..43..
5550058	NGTBR252543-20S	●	R	25	5.5	2-5.5	25	-	25	2	2	150	25	30	GT..43..
5550074	NGTBR252543-35S	●	R	25	5.5	3.5-5.5	25	-	25	2	2	150	25	30	GT..43..
5553433	NGTBR322543-20S	●	R	25	5.5	2-5.5	32	-	32	2	2	170	25	30	GT..43..
5222013	NGTBR322543-35S	●	R	25	5.5	3.5-5.5	32	-	32	2	2	170	25	30	GT..43..
5239843	NGTBL161643-00S	●	L	16	3	1-5.5	16	9	16	2	2	100	25	20	GT..43..
5210901	NGTBL161643-20S	●	L	16	4.5	2-5.5	16	9	16	2	2	100	25	20	GT..43..
5222021	NGTBL161643-35S	●	L	16	4.5	3.5-5.5	16	9	16	2	2	100	25	20	GT..43..
5239868	NGTBL202043-00S	●	L	20	3	1-5.5	20	5	20	2	2	125	25	25	GT..43..
5553367	NGTBL202043-20S	●	L	20	4.5	2-5.5	20	5	20	2	2	125	25	25	GT..43..
5222039	NGTBL202043-35S	●	L	20	4.5	3.5-5.5	20	5	20	2	2	125	25	25	GT..43..
5239892	NGTBL252543-00S	●	L	25	3.5	1-5.5	25	-	25	2	2	150	25	30	GT..43..
5550066	NGTBL252543-20S	●	L	25	5.5	2-5.5	25	-	25	2	2	150	25	30	GT..43..
5550082	NGTBL252543-35S	●	L	25	5.5	3.5-5.5	25	-	25	2	2	150	25	30	GT..43..
5553441	NGTBL322543-20S	●	L	25	5.5	2-5.5	32	-	32	2	2	170	25	30	GT..43..
5222047	NGTBL322543-35S	●	L	25	5.5	3.5-5.5	32	-	32	2	2	170	25	30	GT..43..

ID Grooving | STICK DUO

SBG.. series/Insert bar Carbide

SBG-S Short type / Two-sided

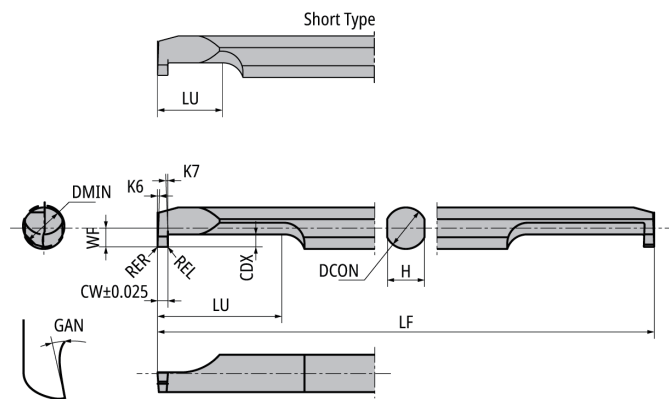


● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	DMIN	APMX	CDX	CW	DCON	GAN	H	K6	K7	LF	LU	REL	RER	WF	Carbide PVD ZM3
			mm	mm	mm	mm	mm	°	mm	°	°	mm	mm	mm	mm	mm	
SBG030050RB-S	R	Yes	3	0.8	1	0.5	3	8	2.7	2	2	50	4.5	0.05	0.05	1.3	●
SBG030075RB-S	R	Yes	3	0.8	1	0.75	3	8	2.7	2	2	50	4.5	0.05	0.05	1.3	●
SBG030100RB-S	R	Yes	3	0.8	1	1	3	8	2.7	2	2	50	4.5	0.05	0.05	1.3	●
SBG030150RB-S	R	Yes	3	0.8	1	1.5	3	8	2.7	2	2	50	4.5	0.05	0.05	1.3	●
SBG040050RB-S	R	Yes	4	1	1.2	0.5	4	8	3.6	2	2	60	6	0.05	0.05	1.8	●
SBG040075RB-S	R	Yes	4	1	1.2	0.75	4	8	3.6	2	2	60	6	0.05	0.05	1.8	●
SBG040100RB-S	R	Yes	4	1	1.2	1	4	8	3.6	2	2	60	6	0.05	0.05	1.8	●
SBG040150RB-S	R	Yes	4	1	1.2	1.5	4	8	3.6	2	2	60	6	0.05	0.05	1.8	●
SBG050050RB-S	R	Yes	5	1.2	1.4	0.5	5	8	4.5	2	2	70	7.5	0.05	0.05	2.3	●
SBG050100RB-S	R	Yes	5	1.2	1.4	1	5	8	4.5	2	2	70	7.5	0.05	0.05	2.3	●
SBG050150RB-S	R	Yes	5	1.2	1.4	1.5	5	8	4.5	2	2	70	7.5	0.05	0.05	2.3	●
SBG050200RB-S	R	Yes	5	1.2	1.4	2	5	8	4.5	2	2	70	7.5	0.05	0.05	2.3	●
SBG060100RB-S	R	Yes	6	1.8	2	1	6	8	5.4	2	2	80	7.5	0.05	0.05	2.8	●
SBG060150RB-S	R	Yes	6	1.8	2	1.5	6	8	5.4	2	2	80	7.5	0.05	0.05	2.8	●
SBG060200RB-S	R	Yes	6	1.8	2	2	6	8	5.4	2	2	80	7.5	0.05	0.05	2.8	●
SBG080100RB-S	R	Yes	8	2.2	2.4	1	8	8	7.3	2	2	80	8.5	0.05	0.05	3.8	●
SBG080150RB-S	R	Yes	8	2.2	2.4	1.5	8	8	7.3	2	2	80	8.5	0.05	0.05	3.8	●
SBG080200RB-S	R	Yes	8	2.2	2.4	2	8	8	7.3	2	2	80	8.5	0.05	0.05	3.8	●

T
Grooving/
Side-Turning

SBG Long type / Two-sided

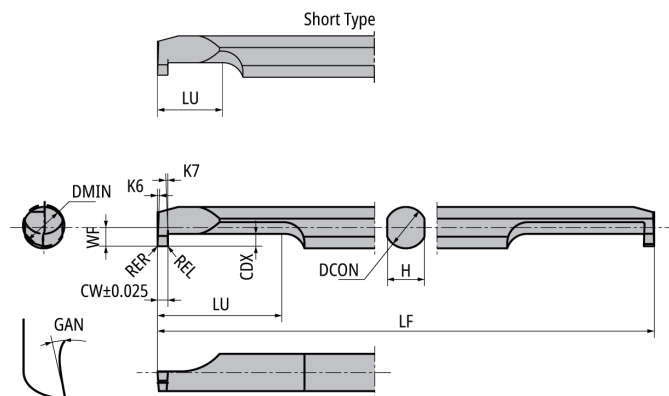


● Diagram shows right-hand tool

Item Number	Hand	Chip-breaker	DMIN	APMX	CDX	CW	DCON	GAN	H	K6	K7	LF	LU	REL	RER	WF	Carbide PVD ZM3
			mm	mm	mm	mm	mm	°	mm	°	°	mm	mm	mm	mm	mm	
SBG030050RB	R	Yes	3	0.8	1	0.5	3	8	2.7	2	2	50	9	0.05	0.05	1.3	●
SBG030075RB	R	Yes	3	0.8	1	0.75	3	8	2.7	2	2	50	9	0.05	0.05	1.3	●
SBG030100RB	R	Yes	3	0.8	1	1	3	8	2.7	2	2	50	9	0.05	0.05	1.3	●
SBG040050RB	R	Yes	4	1	1.2	0.5	4	8	3.6	2	2	60	12	0.05	0.05	1.8	●
SBG040075RB	R	Yes	4	1	1.2	0.75	4	8	3.6	2	2	60	12	0.05	0.05	1.8	●
SBG040100RB	R	Yes	4	1	1.2	1	4	8	3.6	2	2	60	12	0.05	0.05	1.8	●
SBG050050RB	R	Yes	5	1.2	1.4	0.5	5	8	4.5	2	2	70	20	0.05	0.05	2.3	●
SBG050100RB	R	Yes	5	1.2	1.4	1	5	8	4.5	2	2	70	20	0.05	0.05	2.3	●
SBG050150RB	R	Yes	5	1.2	1.4	1.5	5	8	4.5	2	2	70	20	0.05	0.05	2.3	●
SBG060100RB	R	Yes	6	1.8	2	1	6	8	5.4	2	2	80	20	0.05	0.05	2.8	●
SBG060150RB	R	Yes	6	1.8	2	1.5	6	8	5.4	2	2	80	20	0.05	0.05	2.8	●
SBG060200RB	R	Yes	6	1.8	2	2	6	8	5.4	2	2	80	20	0.05	0.05	2.8	●
SBG080100RB	R	Yes	8	2.2	2.4	1	8	8	7.3	2	2	80	20	0.05	0.05	3.8	●
SBG080150RB	R	Yes	8	2.2	2.4	1.5	8	8	7.3	2	2	80	20	0.05	0.05	3.8	●
SBG080200RB	R	Yes	8	2.2	2.4	2	8	8	7.3	2	2	80	20	0.05	0.05	3.8	●

GTG.. series/Inserts Carbide


GTG..005



● Diagram shows left-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	IC	K8	REL	RER	S	Carbide PVD TM4
			mm	mm	mm	°	mm	°	mm	mm	mm	
GTG10050FL005	L	Yes	1	1.2	0.5	60	5.56	2	0.05	0.05	3.18	●
GTG10075FL005	L	Yes	1	1.2	0.75	60	5.56	2	0.05	0.05	3.18	●
GTG10100FL005	L	Yes	1	1.2	1	60	5.56	2	0.05	0.05	3.18	●
GTG10150FL005	L	Yes	1	1.2	1.5	60	5.56	2	0.05	0.05	3.18	●
GTG10200FL005	L	Yes	1	1.2	2	60	5.56	2	0.05	0.05	3.18	●

GTG..



● Diagram shows left-hand tool

Item Number	Hand	Chip-breaker	APMX	CDX	CW	EPSR	IC	K8	REL	RER	S	Carbide PVD	
			mm	mm	mm	°	mm	°	mm	mm	mm	QM3	ZM3
GTG10050FL00	L	Yes	1	1.2	0.5	60	5.56	2	0.05	0.05	3.18	●	●
GTG10065FL00	L	Yes	1	1.2	0.65	60	5.56	2	0.05	0.05	3.18	●	●
GTG10075FL00	L	Yes	1	1.2	0.75	60	5.56	2	0.05	0.05	3.18	●	●
GTG10100FL00	L	Yes	1	1.2	1	60	5.56	2	0.05	0.05	3.18	●	●
GTG10150FL00	L	Yes	1	1.2	1.5	60	5.56	2	0.05	0.05	3.18	●	●
GTG10200FL01	L	Yes	1	1.2	2	60	5.56	2	0.1	0.1	3.18	●	●
GTG14100FL00	L	Yes	2	2.2	1	60	7.94	2	0.05	0.05	3.18	●	●
GTG14150FL00	L	Yes	2	2.2	1.5	60	7.94	2	0.05	0.05	3.18	●	●
GTG14200FL01	L	Yes	2	2.2	2	60	7.94	2	0.1	0.1	3.18	●	●
GTG20150FL	L	Yes	3	3.2	1.5	60	9.525	2	0.2	0.2	3.18	●	●
GTG20200FL	L	Yes	3	3.2	2	60	9.525	2	0.2	0.2	3.18	●	●

T Grooving/
Side-Turning