


インサートバー

ヘキサロビュラ穴用（6-LOBE穴）

SSP-T

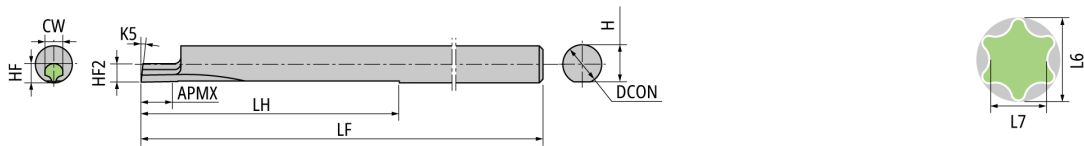


品番	ソケットサイズ	穴番号	L6 mm	L7 mm	推奨下穴 ドリル径 mm	APMX mm	CW mm	DCON mm	H mm	HF mm	HF2 mm	K5 °	LF mm	LH mm	超硬 PVDコート TM4
SSP050N25T06	T6	6	1.75	1.27	1.15	2.5	1.2	5	4.75	1.09	2.4	6	70	35	●
SSP050N31T07	T7	7	2.1	1.5	1.38	3.1	1.4	5	4.75	1.29	2.4	6	70	35	●
SSP050N36T08	T8	8	2.4	1.75	1.62	3.6	1.6	5	4.75	1.5	2.4	6	70	35	●
SSP050N41T10	T10	10	2.8	2.05	1.92	4.1	1.8	5	4.75	1.7	2.4	6	70	35	●
SSP050N43T15	T15	15	3.35	2.4	2.3	4.3	2.2	5	4.75	2.1	2.4	6	70	35	●
SSP050N46T20	T20	20	3.95	2.85	2.71	4.6	2.6	5	4.75	2.5	2.4	6	70	35	●
SSP050N50T25	T25	25	4.5	3.25	3.13	5	3	5	4.75	2.9	2.4	6	70	35	●
SSP050N55T27	T27	27	5.1	3.68	3.52	5.5	3.4	5	4.75	3.3	2.4	6	70	35	●
SSP050N55T30	T30	30	5.6	4.05	3.91	5.5	3.8	5	4.75	3.7	2.4	6	70	35	●

参照ページ: ホルダ → W4～W13 推奨切削条件 → W14

六角穴用

SSP-H

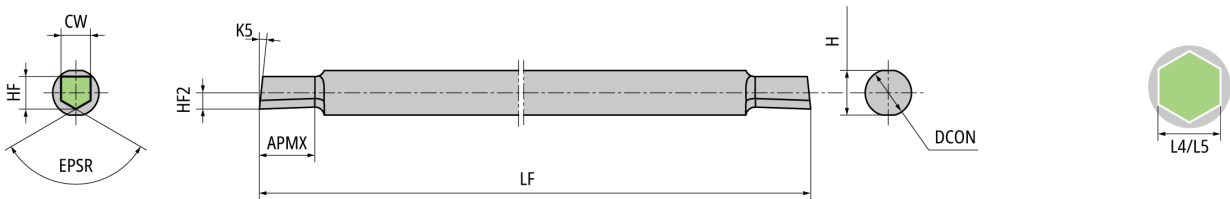


品番	加工基準対辺 L4 mm	加工可能对辺 L5 mm	APMX mm	CW mm	DCON mm	EPSR °	H mm	HF mm	HF2 mm	K5 °	LF mm	超硬 PVDコート TM4
SSP020N06515H	1	1～1.1	1.5	0.65	2	120	1.8	0.7	0.35	15	50	●
SSP020N07018H	1.1	1.1～1.2	1.8	0.7	2	120	1.8	0.8	0.4	15	50	●
SSP020N07518H	1.2	1.2～1.3	1.8	0.75	2	120	1.8	0.9	0.45	15	50	●
SSP020N08020H	1.3	1.3～1.4	2	0.8	2	120	1.8	1	0.5	15	50	●
SSP020N1130H	1.5	1.4～1.9	3	1.1	2	120	1.8	0.9	0.45	6	50	●
SSP020N1430H	2	1.8～2.5	3	1.4	2	120	1.8	1.2	0.6	6	50	●
SSP030N1940H	3	2.3～3.5	4	1.9	3	120	2.8	1.5	0.75	6	50	●
SSP040N2450H	4	3.3～4.5	5	2.4	4	120	3.8	2.5	1.25	6	60	●
SSP050N3260H	5	4.3～6.1	6	3.2	5	120	4.8	3.3	1.65	6	70	●
SSP060N42120H	6	5.3～8.1	12	4.2	6	120	5.6	4	2	6	80	●
SSP080N62160H	8	7.3～12.1	16	6.2	8	120	7.6	4.9	2.45	6	80	●

参照ページ: ホルダ → W4～W13 推奨切削条件 → W14

新製品	N
製品紹介	O
材種・選択ガイド	P
前挽き加工	Q
後挽き加工	R
突切り加工	S
溝入れ加工	T
ねじ切り加工	U
内径加工	V
シェーバー	W
エンドミル	X
技術資料	Y
索引	Z

四角穴用

SSP-S

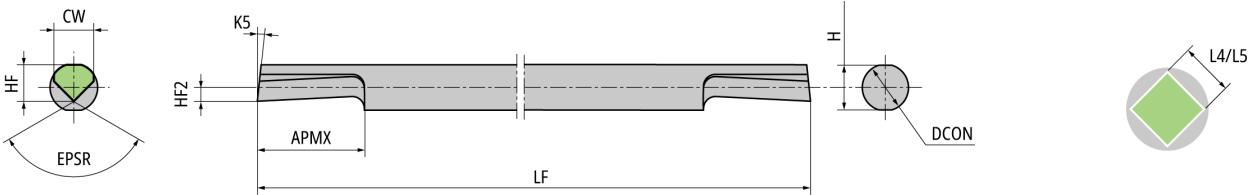


品番	加工基準対辺 L4 mm	加工可能対辺 L5 mm	APMX mm	CW mm	DCON mm	EPSR °	H mm	HF mm	HF2 mm	K5 °	LF mm	超硬 PVDコート TM4
SSP020N1740S	2	2~2.3	4	1.7	2	90	1.8	1.6	0.7	6	50	●
SSP025N1940S	2.5	2.3~2.6	4	1.95	2.5	90	2.3	1.8	0.65	6	50	●
SSP030N2260S	3	2.6~3	6	2.2	3	90	2.8	2.05	0.65	6	50	●
SSP035N2760S	3.5	2.9~3.7	6	2.7	3.5	90	3.3	2.25	0.6	6	60	●
SSP040N3380S	4	3.7~4.5	8	3.35	4	90	3.8	3.05	1.15	6	60	●
SSP050N39100S	5	4.5~5.3	10	3.9	5	90	4.8	3.95	1.55	6	70	●
SSP060N47120S	6	5.3~6.5	12	4.75	8	90	5.6	4.5	1.7	6	80	●
SSP080N58160S	8	6.5~8	16	5.8	8	90	7.6	5.5	1.7	6	80	●

参照ページ: ホルダ → W4~W13 推奨切削条件 → W14

STICK DUO SPLASH

SSP.. シリーズ／スリーブ 【全長位置決め機能 / 内部給油式 / 高精度】

HY-NBH-OH シャンク径 ø16

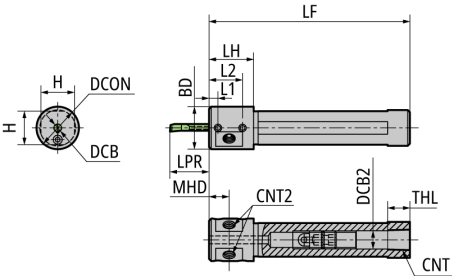

品番	勝手	BD	CNT	CNT2	DCB	DCB2	DCON	H	LF	LH	LPR	L1	L2	MHD	THL	適用インサートバー	
		mm			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
HY-NBH02016G-OH		N	19	Rc1/8	M6×P1.0	2	8.2	16	15	90	19	5〜18	4	15	9.5	10	SBF../SHF../SSP..
HY-NBH02516G-OH		N	19	Rc1/8	M6×P1.0	2.5	8.2	16	15	90	19	6.3〜19.5	4	15	9.5	10	SBF../SHF../SBT../SSP..
HY-NBH03016G-OH		N	19	Rc1/8	M6×P1.0	3	8.2	16	15	90	19	7.5〜21	4	15	9.5	10	SBF../SHF../SBB../SBG../SBT../SSP..
HY-NBH03516G-OH		N	19	Rc1/8	M6×P1.0	3.5	8.2	16	15	90	19	8.8〜24.5	4	15	9.5	10	SBF../SHF../SBT../SSP..
HY-NBH04016G-OH		N	19	Rc1/8	M6×P1.0	4	8.2	16	15	90	24	10〜28	4	20	12	10	SBF../SHF../SBB../SBG../SBT../SSP..
HY-NBH05016G-OH		N	19	Rc1/8	M6×P1.0	5	8.2	16	15	90	24	12.5〜35	4	20	12	10	SBF../SHF../SBG../SBT../SSP..

参照ページ: インサート → W3,W4 推奨切削条件 → W14 接続例 → N28