

CUT DUO Series

Parting-off | CNC automatic lathe



New

Expanded lineup for **2.5 mm** width insert parting-off toolholders
Internal coolant supply ensures efficient cutting edge cooling and extend tool life

CERtainly (but not only) ***CERamics***
Outstanding solutions for demanding applications




| Features


- Achieve stable machining with the combination of mold chipbreaker and high-rigidity toolholder
- Enhanced cutting performance with polished insert relief surfaces
- Extended tool life and improved chip control using internal coolant supply

| Toolholder Design and Structure

Pull-in structure to prevent insert dislodgement

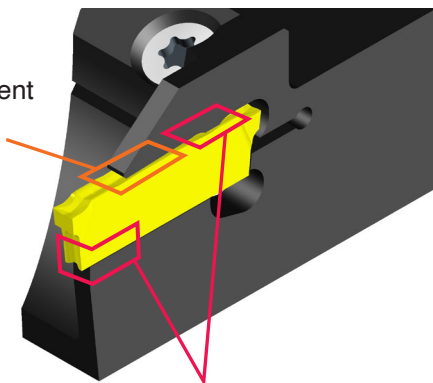


Effortless insertion with precision guide design

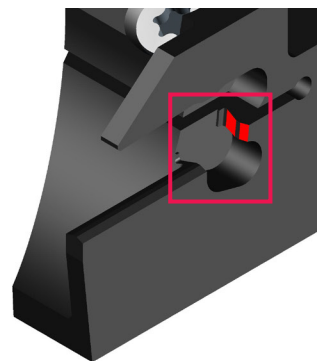

Reliable clamping for lead-angle inserts
— thanks to convex-surface restraint!

Delivers stable performance even under high-feed conditions

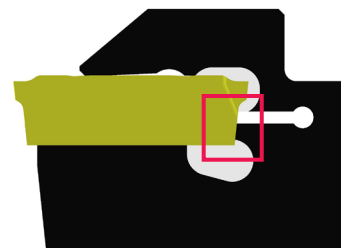

CUT DUO Series


Parting-off | CNC automatic lathe

| Expanded lineup

- Toolholder designed for a maximum parting-off diameter of $\phi 25.4$ mm, offering two insert widths (2.0 / 2.5 mm)
- Optimized design delivers higher rigidity (maximum parting-off diameter $\phi 34.0$ mm)

Toolholder lineup expanded for insert width of 2.5mm

New

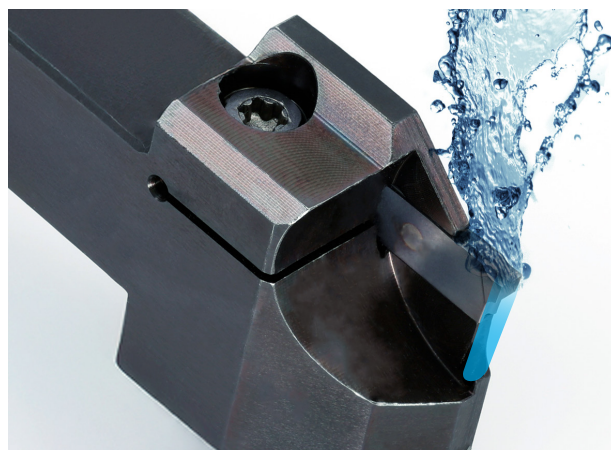

Max. Parting-off Dia.	$\phi 25.4$ mm		$\phi 34$ mm
Insert width	2.0mm	2.5mm	2.5mm
Shank			
16x16mm	●	●	●

| Chip control performance

- Chips are curled compactly to prevent chip problems


$v_c=80$ m/min

Feed rate		0.05mm/rev	0.08mm/rev	0.12mm/rev
Workpiece material				
P Alloy steel SCM435				
M Stainless steel SUS304				

| Recommended cutting condition

ISO Classification		P		M		S	
Workpiece material		Alloy steel	Carbon steel	Difficult-to-cut Stainless steel	Free-cutting Stainless steel	HRSA	Titanium (Alloy)
Representative workpiece material		SCM435 SCr420	S10C S45C	SUS316L 17-4PH SUS304	SUS303 SUS430F	Inco718 Hastelloy MP35N	Ti-6Al-4V
Grade	1st choice	QM3		ST4		DM4	
	2nd choice	TM4		DM4		QM3	
Cutting speed (m/min)		30 - 60 - 90		30 - 60 - 90		30 - 50 - 70	
Feed (mm/rev)		0.04 - 0.08 - 0.12		0.03 - 0.08 - 0.12		0.03 - 0.05 - 0.08	

Lineup: Toolholder

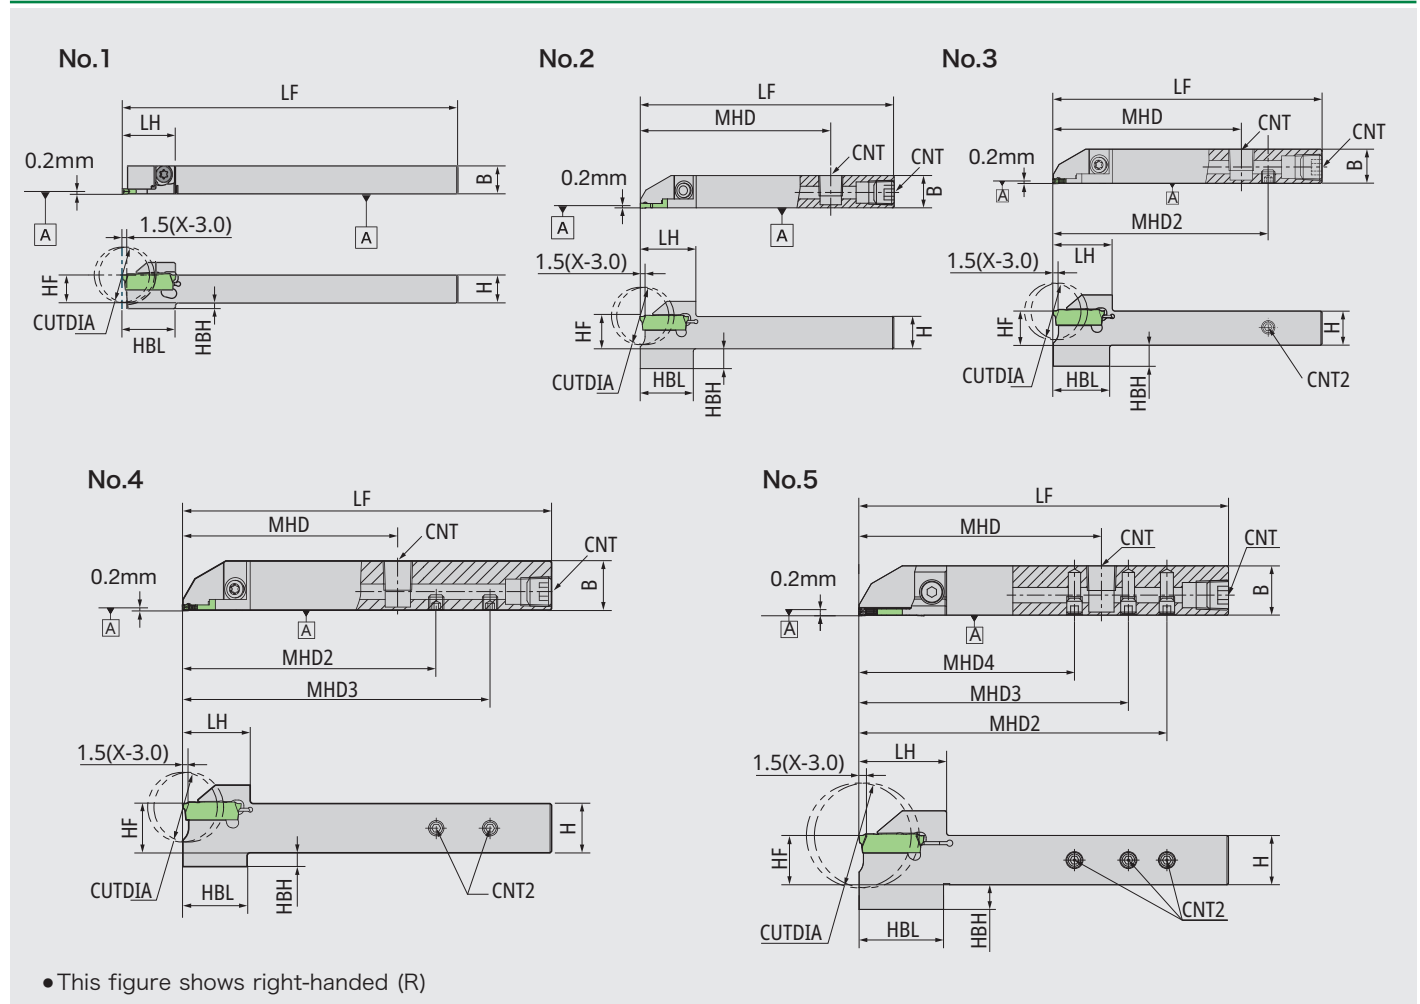

Internal coolant NEW

Designation	Hand R L	CUTDIA mm	B mm	H mm	HF mm	LF mm	LH mm	HBH mm	HBL mm	CNT mm	CNT2 mm	MHD mm	MHD2 mm	MHD3 mm	MHD4 mm	Insert	Figure
CTDP ^R _L 10-20D20	● ●	20	10	10	10	120	19	2	19	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 12-20D20	● ●	20	12	12	12	120	19	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 12-20D25	● ●	25.4	12	12	12	120	22	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 12-20D25-OH	● ●	25.4	12	12	12	100	22	8.5	21	Rc1/8	-	75	-	-	-	CTDP20..	2
CTDP ^R _L 12-20D25-OH2	● ●	25.4	12	12	12	100	22	8.5	21	Rc1/8	M5	70	80	-	-	CTDP20..	3
CTDP ^R _L 16-20D25	● ●	25.4	16	16	16	120	22	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 16-25D25	● ●	25.4	16	16	15.5	120	28.5	-	-	-	-	-	-	-	-	CTDP25..	1
CTDP ^R _L 16-20D25-OH	● ●	25.4	16	16	16	100	22	4.5	21	Rc1/8	-	75	-	-	-	CTDP20..	2
CTDP ^R _L 16-20D25-OH2	● ●	25.4	16	16	16	120	22	4.5	21	Rc1/8	M5	70	82.5	100	-	CTDP20..	4
CTDP ^R _L 16-20D25-OH3	● ●	25.4	16	16	15.5	120	22	4.5	21	Rc1/8	M5	78.75	100	87.5	70	CTDP20..	5
CTDP ^R _L 16-25D25-OH3	● ●	25.4	16	16	15.5	120	28.5	8	27.5	Rc1/8	M5	78.8	100	87.5	70	CTDP25..	5
CTDP ^R _L 16-20D32A	● ●	32	16	16	16	120	27.5	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 2012-20D32A	● ●	32	12	20	20	120	29.5	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 20-20D32A	● ●	32	20	20	20	120	29.5	-	-	-	-	-	-	-	-	CTDP20..	1
CTDP ^R _L 16-25D34A	● ●	34	16	16	16	120	28.5	-	-	-	-	-	-	-	-	CTDP25..	1
CTDP ^R _L 16-25D34A-OH3	● ●	34	16	16	16	120	28.5	8	27.5	Rc1/8	M5	78.8	100	87.5	70	CTDP25..	5
CTDP ^R _L 2012-25D34A	● ●	34	12	20	20	120	29.5	-	-	-	-	-	-	-	-	CTDP25..	1
CTDP ^R _L 20-25D34A	● ●	34	20	20	20	120	29.5	-	-	-	-	-	-	-	-	CTDP25..	1
CTDP ^R _L 20-25D34A-OH2	● ●	34	20	20	20	120	28.5	4	27.5	Rc1/8	M5	75	100	-	-	CTDP25..	3

Attention : Tightening the screw without the insert in place may deform the slit section, potentially preventing it from returning to its original shape even after the screw is properly fastened.

Spare parts


Designation	Screw	Screw	Screw	Wrench	Wrench	Figure
CTDP ^R _L 10-20D20	LRIS-4*12	-	-	LLR-25S	-	1
CTDP ^R _L 12-20D20	LRIS-4*12	-	-	LLR-25S	-	1
CTDP ^R _L 12-20D25	LRIS-4*12	-	-	LLR-25S	-	1
CTDP ^R _L 12-20D25-OH	LRIS-4*12	SPR1/8	-	LLR-25S	-	2
CTDP ^R _L 12-20D25-OH2	LRIS-4*12	SPR1/8	SS0505SC	LLR-25S	LW-2.5	3
CTDP ^R _L 16-20D25	LRIS-4*12	-	-	LLR-25S	-	1
CTDP ^R _L 16-25D25	LRIS-5*10	-	-	LLR-28S	-	1
CTDP ^R _L 16-20D25-OH	LRIS-4*12	SPR1/8	-	LLR-25S	-	2
CTDP ^R _L 16-20D25-OH2	LRIS-4*12	SPR1/8L	SS0505SC	LLR-25S	LW-2.5	4
CTDP ^R _L 16-20D25-OH3	LRIS-4*12	SPR1/8L	SS0505SC	LLR-25S	LW-2.5	5
CTDP ^R _L 16-25D25-OH3	LRIS-5*10	SPR1/8L	SS0505SC	LLR-28S	LW-2.5	5
CTDP ^R _L 16-20D32A	LRIS-5*10	-	-	LLR-28S	-	1
CTDP ^R _L 2012-20D32A	LRIS-5*10	-	-	LLR-28S	-	1
CTDP ^R _L 20-20D32A	LRIS-5*10	-	-	LLR-28S	-	1
CTDP ^R _L 16-25D34A	CS0516LSH	-	-	LW-3	-	1
CTDP ^R _L 16-25D34A-OH3	CS0516LSH	SPR1/8L	SS0505SC	LW-3	LW-2.5	5
CTDP ^R _L 2012-25D34A	CS0516LSH	-	-	LW-3	-	1
CTDP ^R _L 20-25D34A	CS0516LSH	-	-	LW-3	-	1
CTDP ^R _L 20-25D34A-OH2	CS0516LSH	SPR1/8L	SS0505SC	LW-3	LW-2.5	3

N-Swiss JOINT Modular Type

New


Quick-change tool series for automatic lathes

Reduces tool change and set-up times.
Easy-to-use mechanism for consistent repeatability.

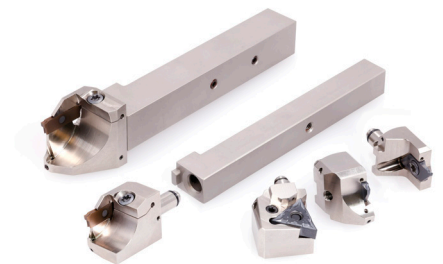

| Shanks

QC-OH/OH2

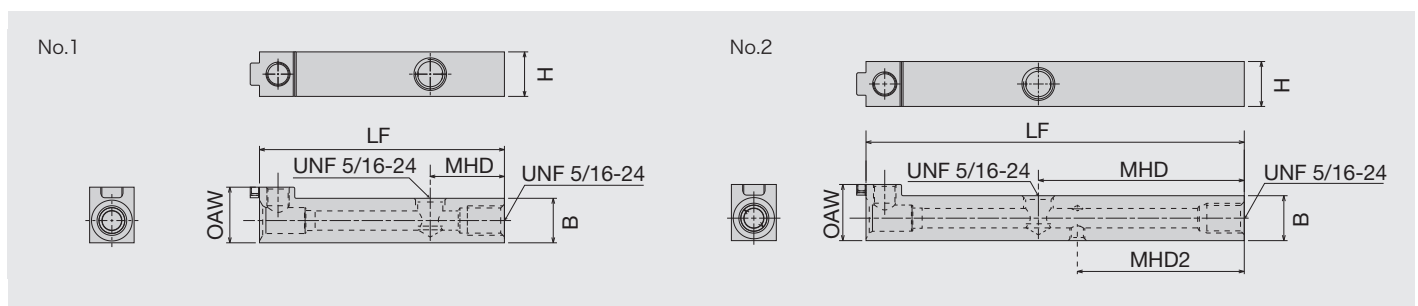

Designation	Internal coolant	H mm	B mm	LF mm	OAW mm	MHD mm	MHD2 mm	Torque ⁽²⁾ N·m	Coupling size	Figure
QC-1212F-OH	Blue drop icon	12	12	65	15	(20)	-	3	QC12-..	1
QC-1212X-OH2 ⁽¹⁾	Blue drop icon	12	12	100	15	(55)	(43.5)	3	QC12-..	2
QC-1616X-OH2 ⁽¹⁾	Blue drop icon	16	16	99	20	(50)	(25)	8.5	QC16-..	2
QC-08F-IN-OH	Blue drop icon	12.7	12.7	65	15	(20)	-	3	QC12-..	1
QC-08X-IN-OH2 ⁽¹⁾	Blue drop icon	12.7	12.7	100	15	(55)	(43.5)	3	QC12-..	2
QC-10X-IN-OH2 ⁽¹⁾	Blue drop icon	15.875	15.875	99	20	(50)	(25)	8.5	QC16-..	2

⁽¹⁾ OH2 :Compatible with direct coolant supply from the machine's tool post to the tool.


⁽²⁾ Torque : Recommended clamping torque (N·m)

Spare parts



Designation	Screw	Screw	Screw	Wrench	Wrench	Wrench	Wrench
QC-1212F-OH	QC-08F-IN-OH	M6*0.5-TSC	-	5/16UNF-TSC	-	TR-3	TR-4
QC-1212X-OH2	QC-08X-IN-OH2	M6*0.5-TSC	SSM4*6-T	5/16UNF-TSC	TR-2	TR-3	TR-4
QC-1616X-OH2	QC-10X-IN-OH2	M8*0.5-TSC	SSM4*6-T	5/16UNF-TSC	TR-2	-	TR-4

QC-1216-OH/OH2 15mm Shift Shank

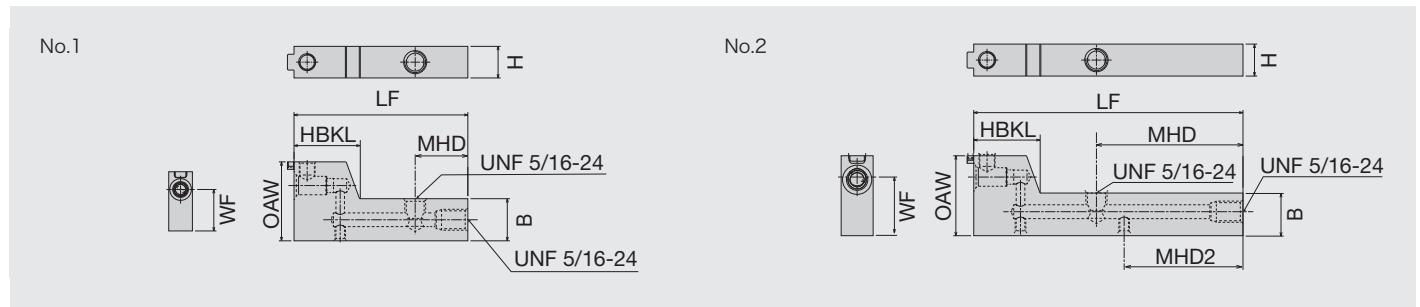

Designation	Internal coolant	H mm	B mm	LF mm	OAW mm	WF mm	HBKL mm	MHD mm	MHD2 mm	Torque ⁽²⁾ N·m	Coupling size	Figure
QC-1216F-F15-OH		12	16	65	30	21	25	(20)	-	3	QC12-..	1
QC-1216X-F15-OH2 ⁽¹⁾		12	16	100	30	21	25	(55)	(43.5)	3	QC12-..	2

Shift Shank : By shifting the cutting edge position, machining can be performed without the workpiece detaching from the guide bush.
This makes it easier for coolant to reach the cutting point, improving chip control.

⁽¹⁾ OH2 :Compatible with direct coolant supply from the machine's tool post to the tool.

⁽²⁾ Torque : Recommended clamping torque (N·m)


Spare parts



Designation	Screw	Screw	Screw	Wrench	Wrench	Wrench
QC-1216F-F15-OH	M6*0.5-TSC	-	5/16UNF-TSC	-	TR-3	TR-4
QC-1216X-F15-OH2	M6*0.5-TSC	SSM4*6-T	5/16UNF-TSC	TR-2	TR-3	TR-4

Heads

QC-CTDP-OH

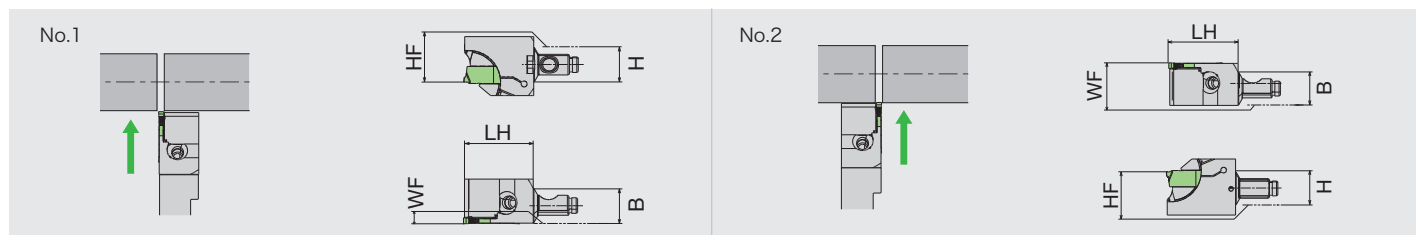

Designation	Internal coolant	CUTDIA mm	H mm	B mm	LH mm	HF mm	WF mm	Insert	Applicable shank size	Figure
QC12-CTDPR-20D20-OH		20	12	12	23.5	12	0.2	CTDP20..	QC-12..	1
QC12-CTDPL-20D20-OH		20	12	12	23.5	12	15.2	CTDP20..	QC-12..	2
QC16-CTDPR-20D32-OH		32	16	16	24.5	16	0.2	CTDP20..	QC-16..	1
QC16-CTDPL-20D32-OH		32	16	16	24.5	16	20.2	CTDP20..	QC-16..	2

Spare parts




Item Number	O-Rings	Screw	Wrench
QC12-CTDPR-20D20-OH	OR-450*10	LRIS-4*12	LLR-25S
QC12-CTDPL-20D20-OH	OR-450*10	LRIS-4*12	LLR-25S
QC16-CTDPR-20D32-OH	OR-750*10	LRIS-4*12	LLR-25S
QC16-CTDPL-20D32-OH	OR-750*10	LRIS-4*12	LLR-25S

Stopper By attaching a stopper to the unused shank, the coupling part is protected, and coolant discharge from the shank is prevented.




品番	O-Rings	Applicable shank size	Figure
QC12-STOPPER-PLUG	OR-450*10	QC12	1
QC16-STOPPER-PLUG	OR-750*10	QC16	2

Thread conversion adapter When using conventional hoses and fittings, please use a threaded adapter.

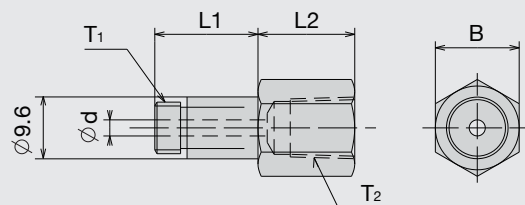

Designation	T ₁ mm	T ₂ mm	L1 mm	L2 mm	φd mm	B mm
SCJ-5/16-RC1/8-L	5/16-24UNF	Rc1/8	16.0	15.0	2.5	13.0


Accessories Dedicated accessory for easy replacement of inserts mounted on the modular head.



Designation	BD mm	LB mm	H mm	B mm	Screw	Coupling size
QC-12D28	28	80	25	25	TAB-5*10	QC12-..
QC-16D28	28	80	25	25	TAB-5*10	QC16-..

For more information on **N-Swiss JOINT**, please see the product brochure and website.



Lineup: Insert


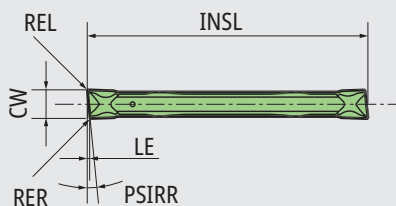




● NEW

Designation	Hand	CW mm	INSL mm	PSIRR °	LE mm	REL mm	RER mm	Carbide PVD Coated Carbide Grade			
								DM4	QM3	ST4	TM4
CTDP20N	N	2.0	19.1	0	0	0.05	0.05	●	●	●	●
CTDP20N02	N	2.0	19.1	0	0	0.20	0.20	●	●	●	●
CTDP20R6	R	2.0	19.1	6	0.24	0.05	0.05	●	●	●	●
CTDP20R15	R	2.0	19.1	15	0.57	0.05	0.05	●	●	●	●
CTDP25N	N	2.5	21.2	0	0	0.05	0.05	●	●	●	●
CTDP25N02	N	2.5	21.2	0	0	0.20	0.20	●	●	●	●
CTDP25R6	R	2.5	21.2	6	0.29	0.05	0.05	●	●	●	●
CTDP25R15	R	2.5	21.2	15	0.71	0.05	0.05	●	●	●	●

Practical examples

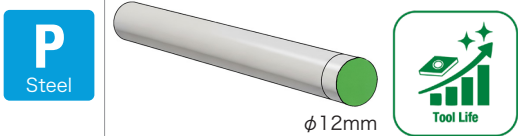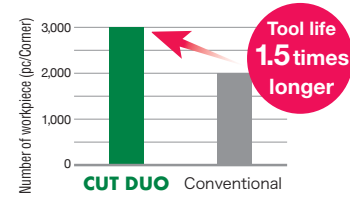	NTK	Conventional
Component	Electronic parts	
Insert	CTDP20R6	Width : 2.2mm
Grade	QM3	PVD Carbide
Workpiece	Alloy steel (SCM435)	
		
Cutting conditions	Cutting speed (m/min)	75
	Feed (mm/rev)	0.04
	Coolant	WET
Results	 The conventional tool suffered from poor cutting performance, leading to burr formation and reduced tool life. In contrast, CUT DUO maintained sharpness and achieved a 1.5x increase in tool life.	

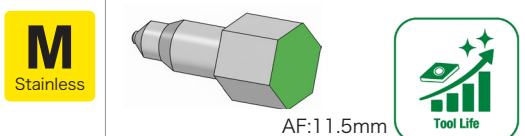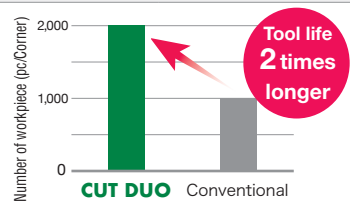	NTK	Conventional
Component	Automotive parts	
Insert	CTDP20N02	Width : 2.0mm
Grade	ST4	PVD Carbide
Workpiece	Carbon steel (S43C)	
		
Cutting conditions	Cutting speed (m/min)	90
	Feed (mm/rev)	0.08
	Coolant	WET
Results	 The conventional tool lacked sharpness, causing burrs and early failure under interrupt cutting due to edge chipping. CUT DUO suppressed burrs and doubled tool life.	

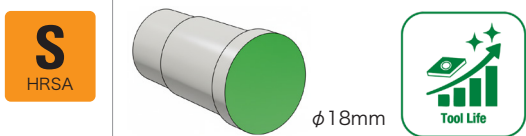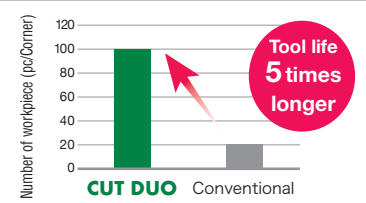	NTK	Conventional
Component	Fuel cell parts	
Insert	CTDP20N02	Width : 2.0mm
Grade	DM4	PVD Carbide
Workpiece	Inconel718	
		
Cutting conditions	Cutting speed (m/min)	80
	Feed (mm/rev)	0.03
	Coolant	WET
Results	 The cutting edge of the conventional product wore out after machining 20 pieces, leading to poor machining surface and tool breakage. CUT DUO reduced cutting resistance and achieved 5 times longer tool life.	



NTK CUTTING TOOLS JAPAN

2808 Iwazaki, Komaki, Aichi 485-8510, Japan

Tungaloy-NTK America, Inc.

3726 N. Ventura Drive
Arlington Heights
IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us
https://www.ntkcuttingtools.com/us/

Tungaloy Canada

432 Elgin St. Unit 3, Brantford
Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy-NTK de Mexico S.A.

C/ Los Arellano 113
Parque Industrial Siglo XXI
Aguascalientes, AGS
Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx
https://www.ntkcuttingtools.com/mx/

Tungaloy-NTK do Brasil Ltda.

Avd. Independencia N4158
Residencial Flora
13280-000 Vinhedo
São Paulo, Brazil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br
https://www.ntkcuttingtools.com/br/

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah. bayraktar
Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430 Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

NTK Cutting Tools (Shanghai) Co., Ltd

Room 103, Building C, No. 7666 Zhong-
chun Road, Minhang District, Shanghai,
200131, China
Phone: +86-21-64788878
Fax: +86-21-64788879
www.ntkcuttingtools.com/zh-hans/

Tungaloy-NTK Germany GmbH

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de
https://www.ntkcuttingtools.com/de/

Tungaloy France S.A.S.

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Viale Sarca 336/Edificio 13
20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o

Turanka 1583/115g,
627 00 Brno, Czech Republic
Phone: +420-532 123 391
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.com/es

Tungaloy-NTK Cutting Tools (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th
https://www.ntkcuttingtools.com/th/

Tungaloy Cutting Tools (Taiwan) Co.,Ltd.

9F. No.293, Zhongyang Rd,
Xinzhuang Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1,
#08-09 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sg

Tungaloy-NTK Vietnam LLC

3rd Floor, Licogi 13 Tower,
164 Khuat Duy Tien, Nhan Chinh, Thanh
Xuan District,
Hanoi, Vietnam
Phone: +84 24 63282086
www.tungaloy.com/vn

Tungaloy Scandinavia AB

Bultgatan 38, 442 40
Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wrocławskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy-NTK U.K. Ltd

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk
https://www.ntkcuttingtools.com/uk/

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy-NTK Korea Ltd

1040 Gachang-ro, Gachang-myeon,
Dalseong-gun, Daegu, 42936, Korea
Phone: +82-53-760-7698
Fax: +82-53-768-9912
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan
SS6/14, Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10
No.3-5 Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id